

5.2mm FUSE BLOCK

Specifications:

*Electrical:Rated for currents up to 10A

*Clip/Terminals:Nickel-plated or Tin-plated spring Brass.

*Insulation:Nylon

#Specification:

1.Insertion & Extraction Force=1kg.Min.


2.Dielectric Strength For 60 Seconds=AC 2000 V Min.

3.Suitable Rated Current=6.3A 250V


4.Insulation Resistance At 500V DC=100M Ω Min.

5.Temperature Rise=50°C Max.

6.Voltage Drop=20 mV Max.

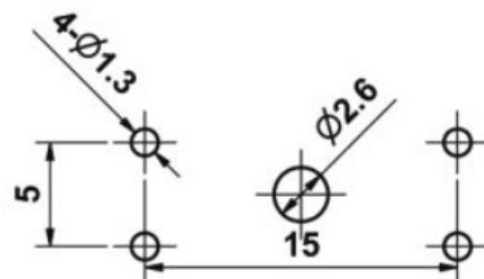

MOUNTING HOLES

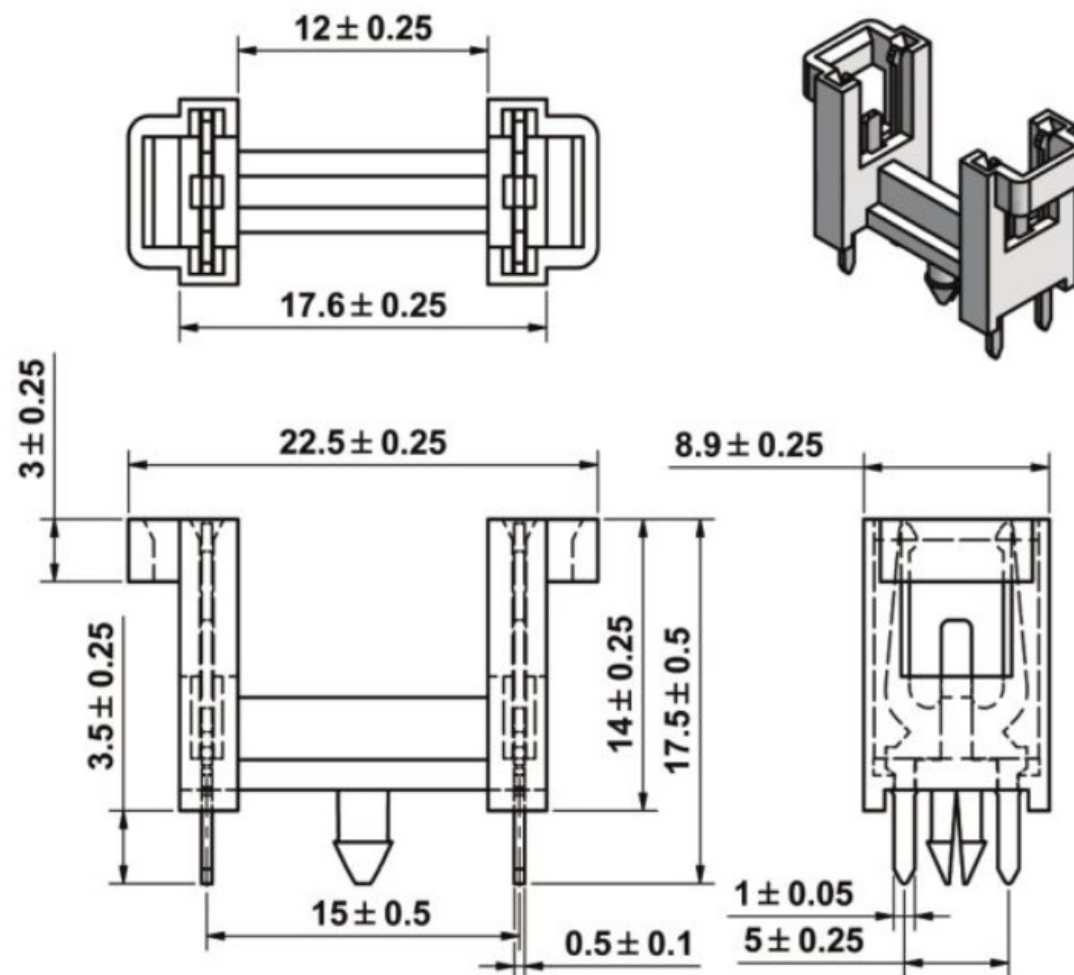

EL.ITALIA
COMPONENTI ELETTRONICI
ED ELETTROMECCANICI DAL 1981

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2° XX ± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	DONGGUAN TIANRUI ELECTRONIC CO., LTD.
		DRAWN BY	
		CHECKED BY	TITLE
		APPROVED BY	FUSE BLOCK
MATERIAL		DATE 2004/11/24	PART NO. UY-CQ200I
REV 1.0		SCALE	DRAWING NO.