
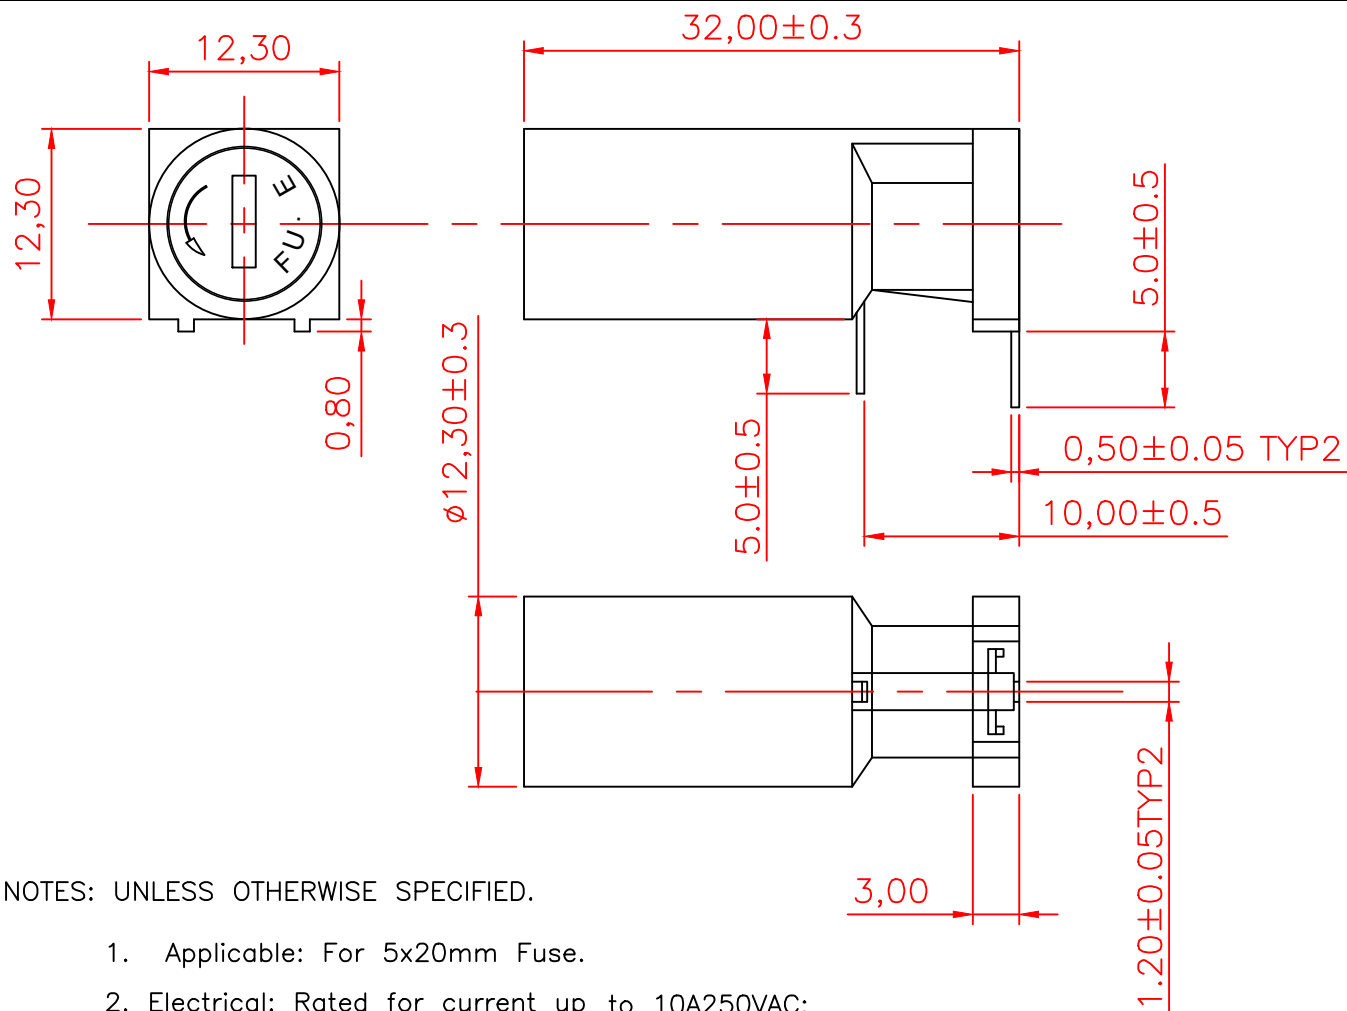


Mounting Hole

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For 5x20mm Fuse.
2. Electrical: Rated for current up to 10A250VAC;
3. Insulating Base body: PBT; Cap: PBT
4. Bayonet type cap; PC Board mount terminal;
5. Terminals: Brass with Tin-plated solderable type.
6. UL VDE CQC CE;

RoHS COMPLIANT		PROJ.		P/N:	UY-H3-56B		El.italia srl Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy info@elitaliaweb.it www.elitaliaweb.it www.contenitoriplastici.it	
SCALE:	FIT	TOLERANCE		TITLE:				
UNIT:	MM	LINEAR	ANGLE		PCB MOUNT FUSE HOLDER FOR 5X20mm FUSE			
SIZE:	A4	X. ± 1	X.° ± 5°	DONGGUAN TIANRUI ELECTRONICS CO.,LTD.				
REV:	A	.X ± 0.38	.X° ± 2°					
DATE:		.XX ± 0.25	.XX° ± 1°					
SHEET:	1/2	.XXX ± 0.10						

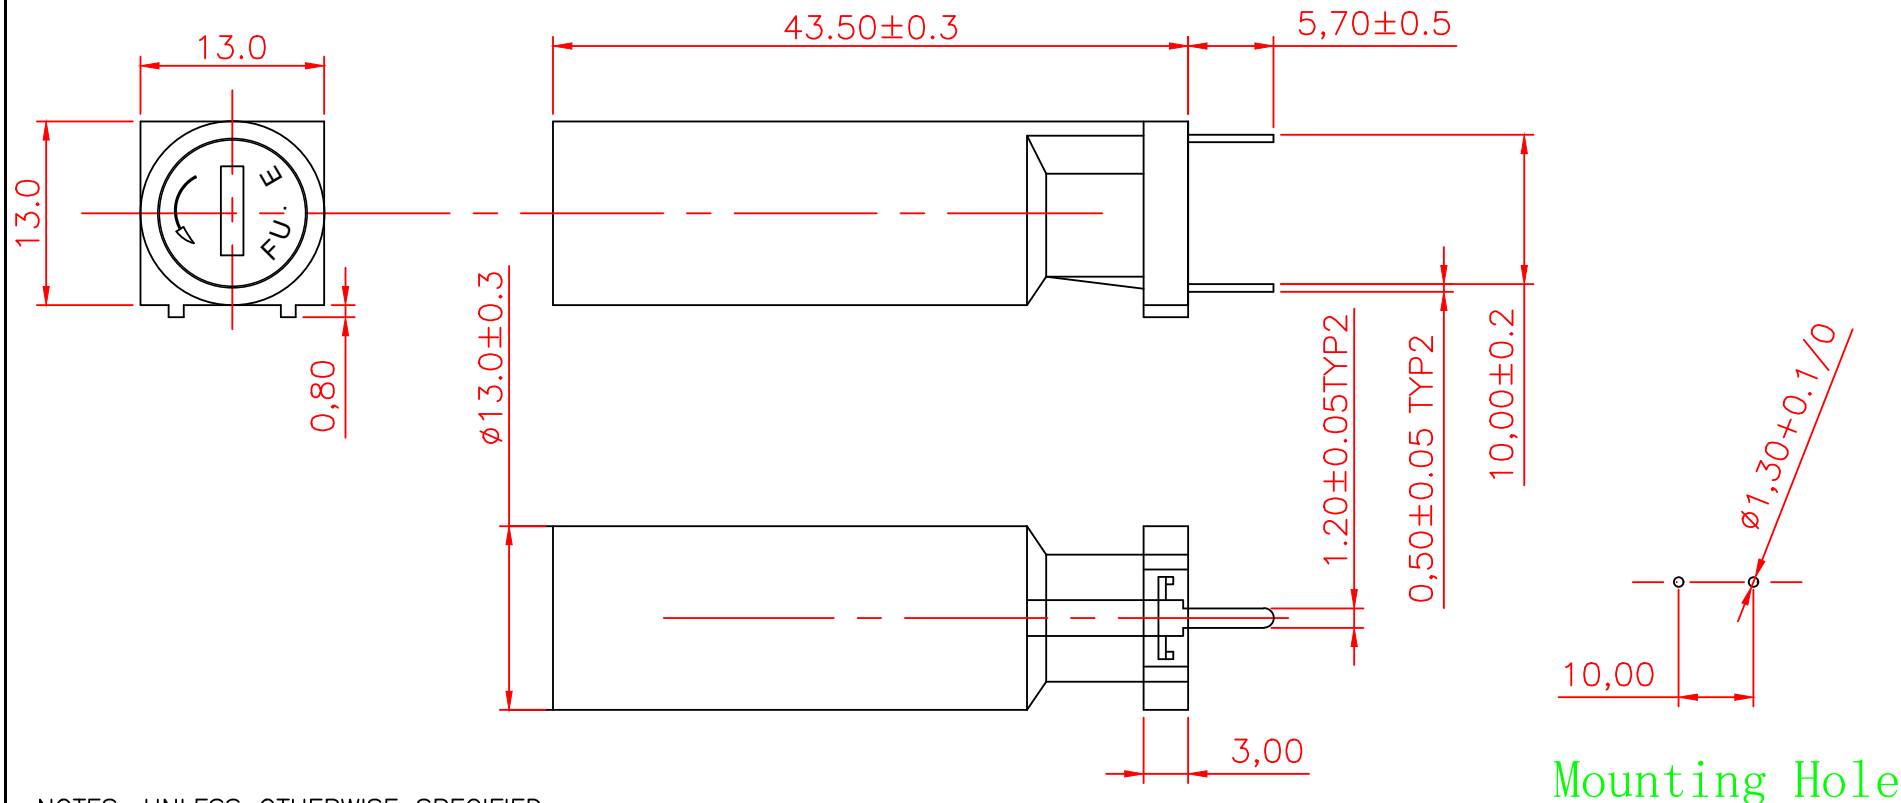

Mounting Hole

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For 6X30mm Fuse.
2. Electrical: Rated for current up to 16A250VAC;
3. Insulating Base body: PBT; Cap: PBT
4. Bayonet type cap; PC Board mount terminal;
5. Terminals: Brass with Tin-plated solderable type.
6. UL VDE CE CQC;

RoHS COMPLIANT		PROJ.		P/N:	UY-H3-60B		El.italia srl Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy info@elitaliaweb.it www.elitaliaweb.it www.contenitoriplastici.it	
SCALE:	FIT	TOLERANCE		TITLE:				
UNIT:	MM	LINEAR	ANGLE		PCB MOUNT FUSE HOLDER FOR 5X20mm FUSE			
SIZE:	A4	X. ± 1	X.° ± 5°					
REV:	A	.X ± 0.38	.X° ± 2°					
DATE:		.XX ± 0.25	.XX° ± 1°	DONGGUAN TIANRUI ELECTRONICS CO.,LTD.				
SHEET:	2/2	.XXX ± 0.10						