


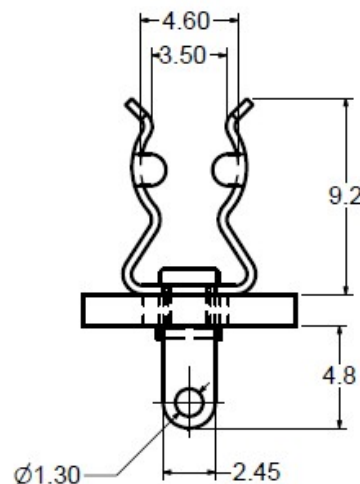


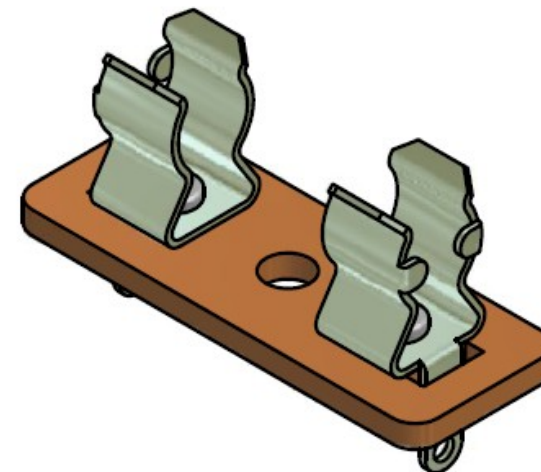

EL.ITALIA
COMPONENTI ELETTRONICI
ED ELETTROMECCANICI DAL 1981

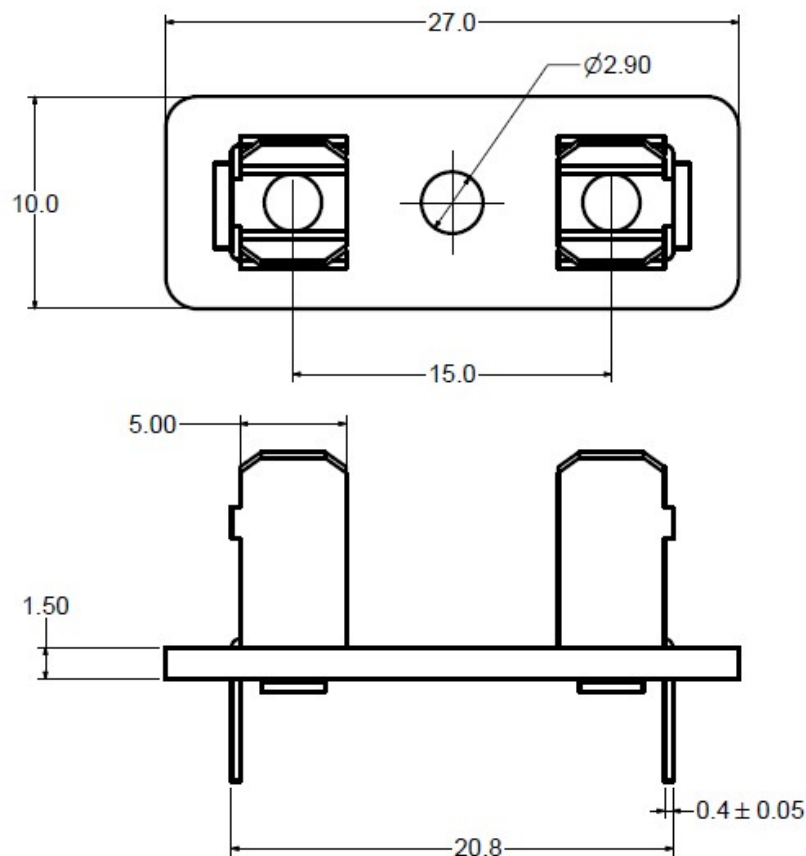

Recommend mounting hole

$\phi 5.2\text{mm}$ FUSE BLOCK

- 1.Clip: List
- 2.Plating specification: List
- 3.Base: Phenolic resin
- 4.Insertion & Extraction Force: Min. 1kg
- 5.Electrical: Rated 10A 250V
- 6.Dielectric Strength for 60 Seconds: AC 500V Min.
- 7.Insulation Resistance at 500 V DC: 100M Ω Min.
- 8.Temperature Rise: 55°C Max.
- 9.Voltage Drop: 20mV Max.

Part No	Clip Material	Plated Spec:
508	Brass	Bright Sn, minimum 3 μm
508S	Phosphor Bronze	Ni minimum 3 μm

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X $\pm$ 0.5 $\pm$ 2 XX $\pm$ 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	DONGGUAN TIANRUI ELECTRONICS
		DRAWN BY Tim	
 	P/N:	CHECKED BY 	TITLE $\phi 5.2\text{mm}$ Fuse Block
		APPROVED BY 	
REV	B	DATE 2017/4/13	PART NO. UY-JH-508_508S
		SCALE	DRAWING NO.