


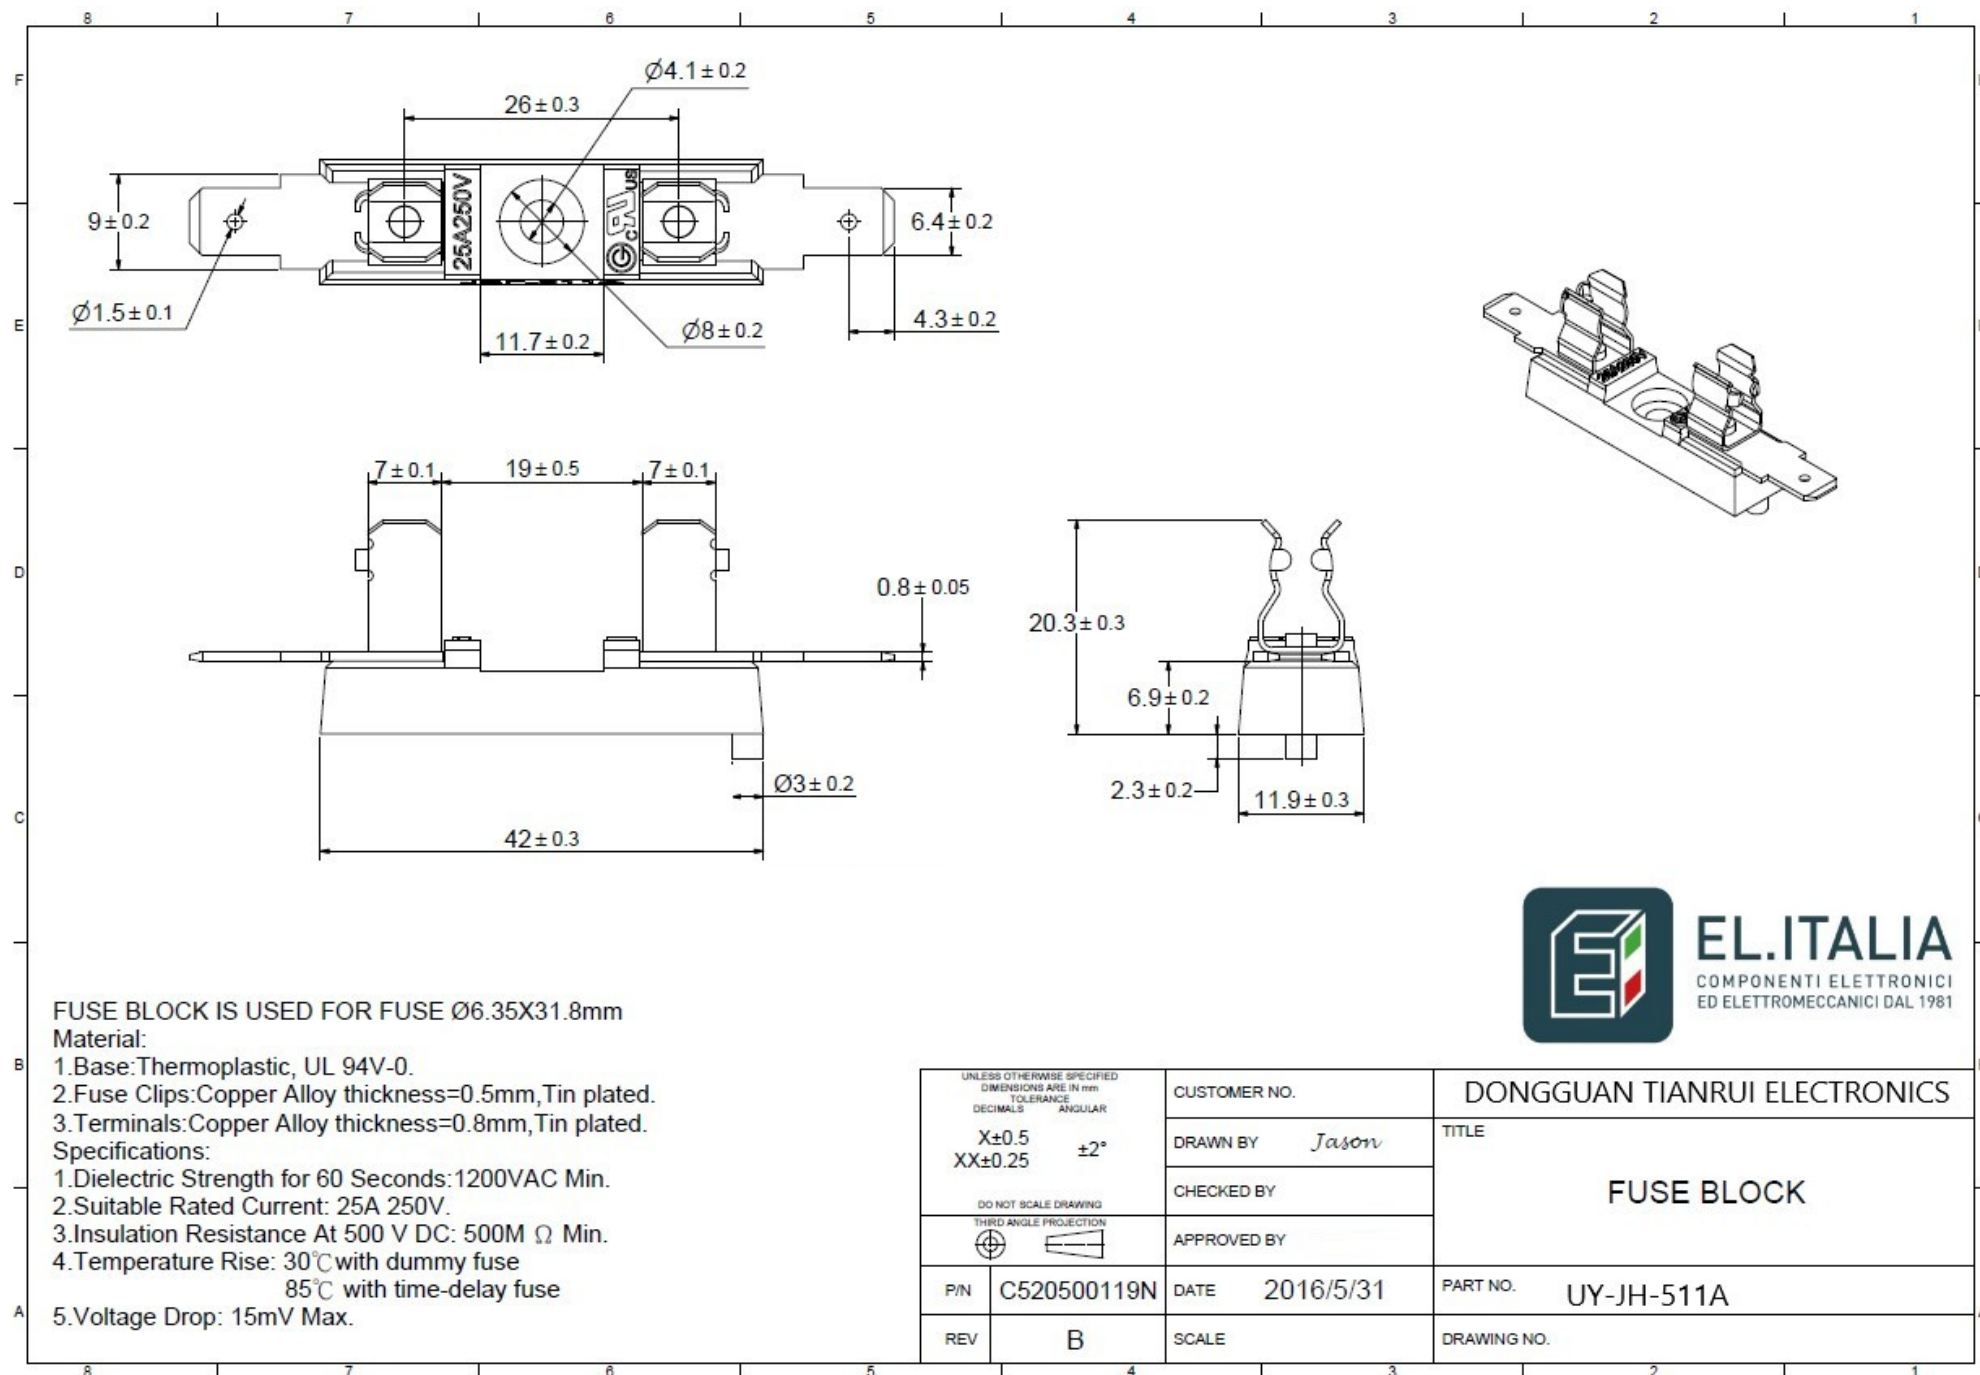

FUSE BLOCK IS USED FOR FUSE $\varnothing 6.35 \times 31.8$ mm

Material:

1. Base: Thermoplastic, UL 94V-0.

2. Fuse Clips: Copper Alloy thickness=0.5mm, Tin plated.

3. Terminals: Copper Alloy thickness=0.8mm, Tin plated.

Specifications:

1. Dielectric Strength for 60 Seconds: 1200VAC Min.

2. Suitable Rated Current: 25A 250V.

3. Insulation Resistance At 500 V DC: 500M Ω Min.

4. Temperature Rise: 30°C with dummy fuse
85°C with time-delay fuse

5. Voltage Drop: 15mV Max.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR $X \pm 0.5$ $XX \pm 0.25$ DO NOT SCALE DRAWING THIRD ANGLE PROJECTION	CUSTOMER NO.	DONGGUAN TIANRUI ELECTRONICS
	DRAWN BY <i>Jason</i>	TITLE FUSE BLOCK
	CHECKED BY	
	APPROVED BY	
P/N	C520500119N	DATE 2016/5/31
REV	B	SCALE
		PART NO. UY-JH-511A
		DRAWING NO.