
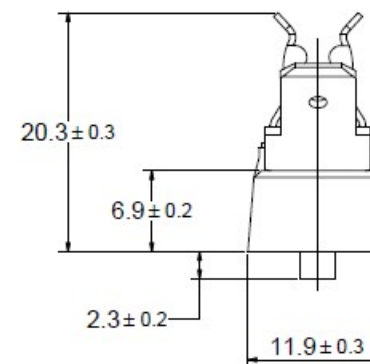
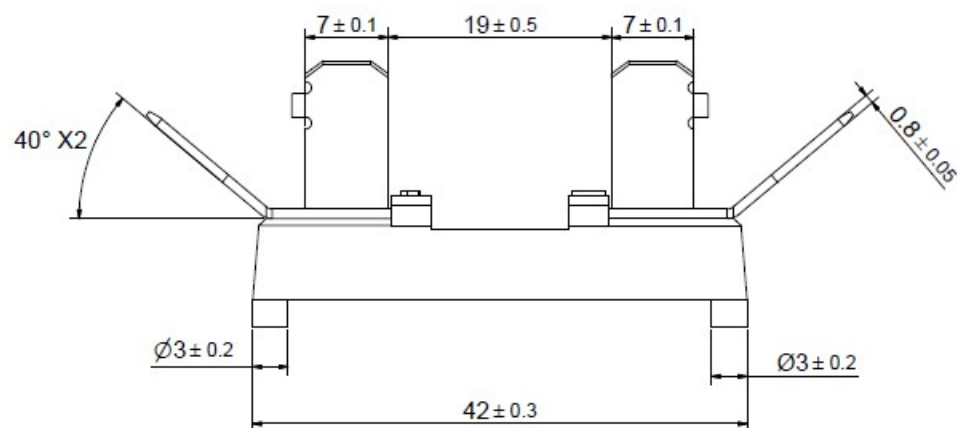



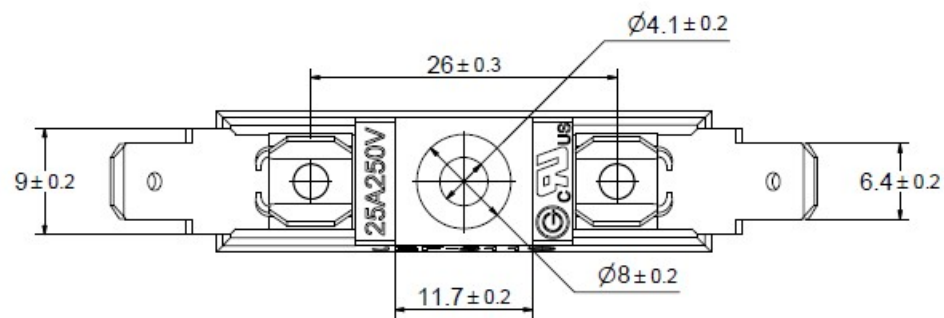

FUSE BLOCK IS USED FOR FUSE Ø6.35X31.8mm

Material:

- 1.Base:Thermoplastic, UL 94V-0.
- 2.Fuse Clips:Copper Alloy thickness=0.5mm,Tin plated.
- 3.Terminals:Copper Alloy thickness=0.8mm,Tin plated.

Specifications:

- 1.Dielectric Strength for 60 Seconds:1200VAC Min.
- 2.Suitable Rated Current: 25A 250V.
- 3.Insulation Resistance At 500 V DC: 500M Ω Min.
- 4.Temperature Rise: 30°C with dummy fuse
85°C with time-delay fuse
- 5.Voltage Drop: 15mV Max.



EL.ITALIA
COMPONENTI ELETTRONICI
ED ELETTRMECCANICI DAL 1981

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR $X \pm 0.5$ $XX \pm 0.25$ DO NOT SCALE DRAWING THIRD ANGLE PROJECTION 	CUSTOMER NO.	DONGGUAN TIANRUI ELECTRONICS	
	DRAWN BY <i>Jason</i>	TITLE FUSE BLOCK	
	CHECKED BY		
	APPROVED BY		
P/N	C520500121N	DATE	2016/5/31
REV	B	SCALE	
		PART NO.	UY-JH-511C
		DRAWING NO.	