
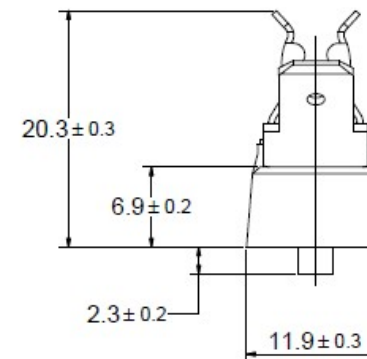
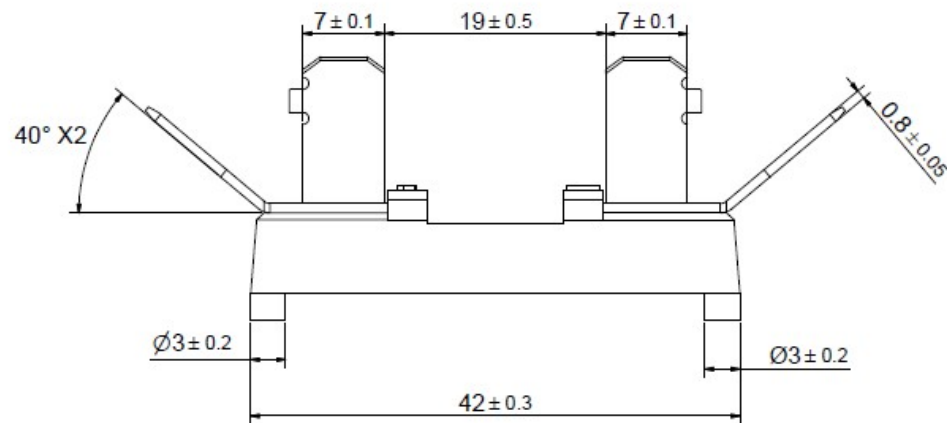



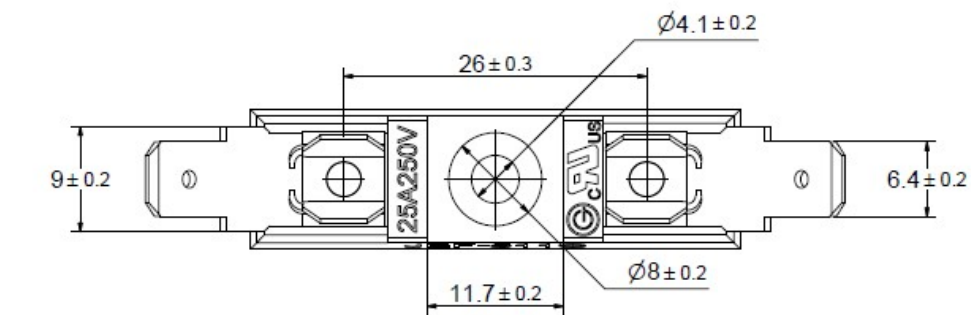

FUSE BLOCK IS USED FOR FUSE Ø6.35X31.8mm

Material:


- 1.Base:Thermoplastic, UL 94V-0.
- 2.Fuse Clips:Copper Alloy thickness=0.5mm,Tin plated.
- 3.Terminals:Copper Alloy thickness=0.8mm,Tin plated.

Specifications:

- 1.Dielectric Strength for 60 Seconds:1200VAC Min.
- 2.Suitable Rated Current: 25A 250V.
- 3.Insulation Resistance At 500 V DC: 500M Ω Min.
- 4.Temperature Rise: 30°C with dummy fuse
85°C with time-delay fuse
- 5.Voltage Drop: 15mV Max.



EL.ITALIA
COMPONENTI ELETTRONICI
ED Elettromeccanici DAL 1981

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm DECIMALS TOLERANCE ANGULAR X±0.5 XX±0.25 ±2° DO NOT SCALE DRAWING THIRD ANGLE PROJECTION 		CUSTOMER NO.	DONGGUAN TIANRUI ELECTRONICS		
		DRAWN BY Jason	TITLE FUSE BLOCK		
		CHECKED BY			
		APPROVED BY			
P/N	C520500121N	DATE	2016/5/31	PART NO.	UY-JH-511E
REV	B	SCALE		DRAWING NO.	