
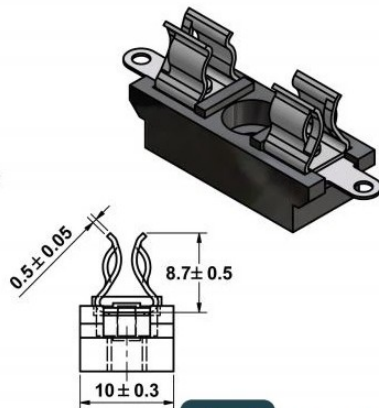


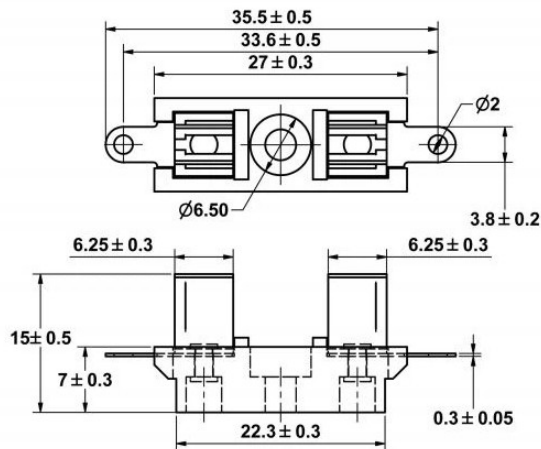

5.2mm FUSE BLOCK

SPECIFICATIONS:

*Electrical: Rated for currents up to 15A

*Clip/Terminals: Ni-plated spring brass. Ear type.

*Base: Phenolic laminate bakelite

SPECIFICATIONS :

1. Insertion & Extraction Force=1.5Kg.Min.
2. Dielectric Strength For 60 Seconds=AC 2000V Min.
3. Suitable Rated Current=15A 250V
4. Insulation Resistance At 500V DC=500M Ω Min.
5. Temperature Rise=60°C Max.



EL.ITALIA

COMPONENTI ELETTRICI
ED ELETTROMECCANICI DAL 1981

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALS ANGULAR Xs 0.5 ± 2' XXs 0.25 DO NOT SCALE DRAWING  	CUSTOMER NO.	DONGGUAN TIANRUI ELECTRONIC CO.
	DRAWN BY	
	CHECKED BY	TITLE FUSE BLOCKS
	APPROVED BY	
MATERIAL	DATE 2004/12/10	PART NO. UY-JH-518
REV 1.0	SCALE	DRAWING NO.