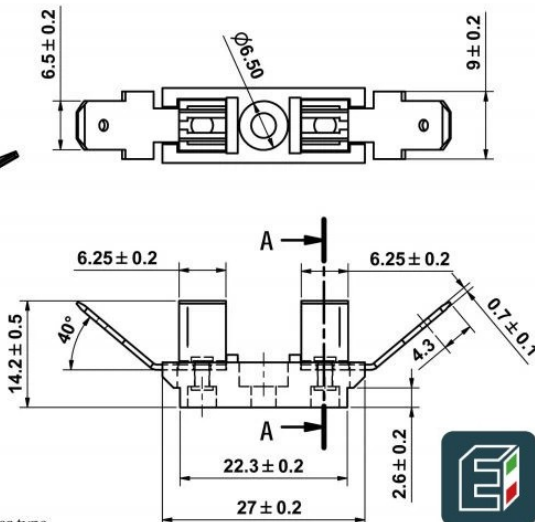




5.2mm FUSE BLOCK

SPECIFICATIONS:

*Electrical: Rated for currents up to 15A

*Clip/Terminals: Tin-plated spring brass. Ear type.

*Base: Phenolic laminate bakelite

SPECIFICATIONS :

1. Insertion & Extraction Force=1.5Kg. Min.

2. Dielectric Strength For 60 Seconds=AC 2000V Min.

3. Suitable Rated Current=15A 250V

4. Insulation Resistance At 500V DC=500M Ω Min.

5. Temperature Rise=60°C Max.



EL.ITALIA

COMPONENTI ELETTRONICI
ED ELETTROMECCANICI DAL 1981

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM		CUSTOMER NO.		DONGGUAN TIANRUI ELECTRONIC CO., LTD.	
TOLERANCE		DRAWN BY		TITLE	
DECIMALS	ANGULAR	CHECKED BY		FUSE BLOCKS	
X ± 0.5	± 2°	APPROVED BY		PART NO. UY-JH-518A	
XX ± 0.25		DATE 2004/11/29		DRAWING NO.	
DO NOT SCALE DRAWING		SCALE			
MATERIAL					
REV	1.0				