
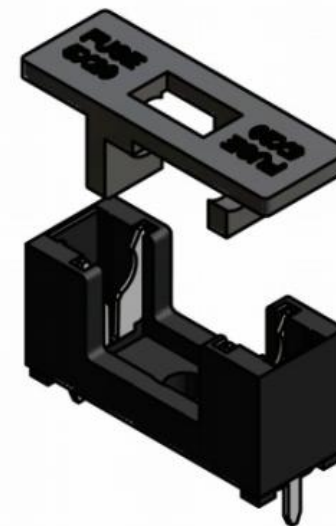
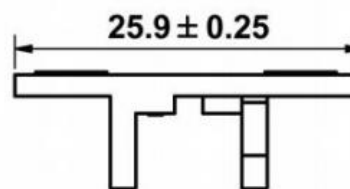
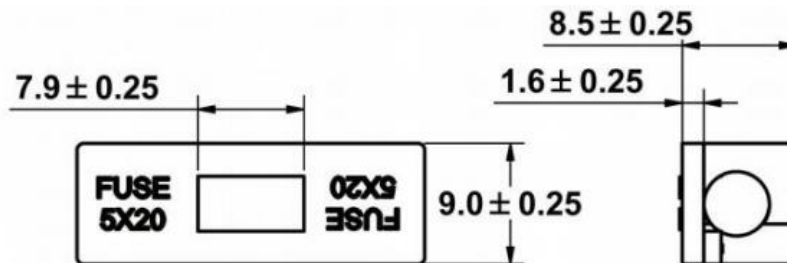


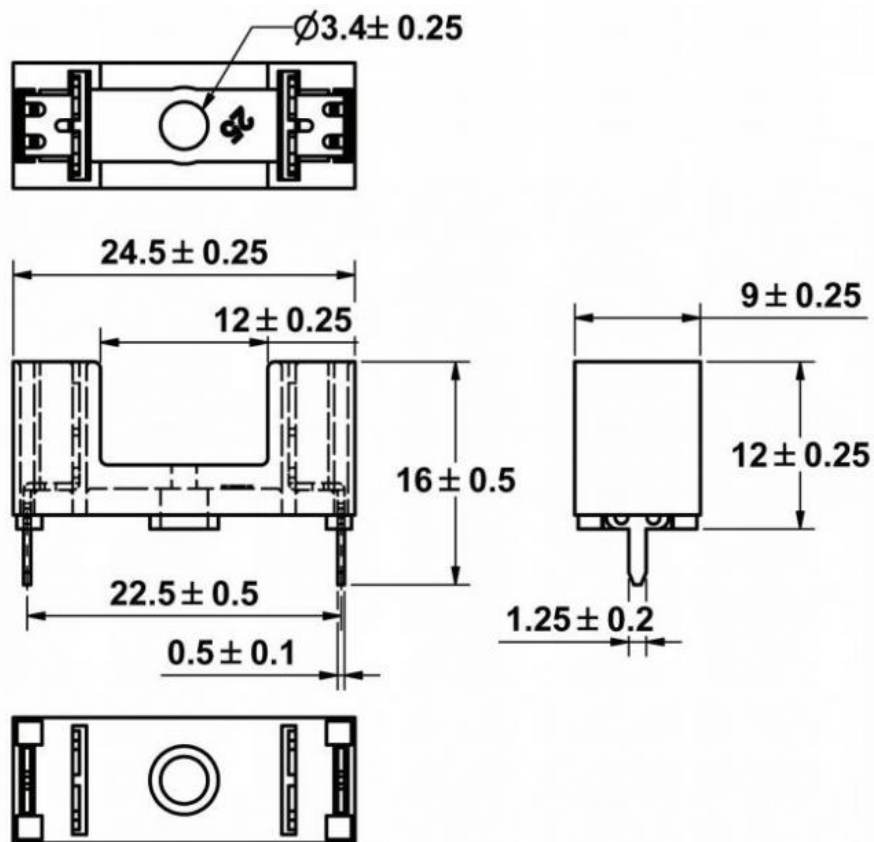

Electrical	Rated for currents up to 10A
Clip/Terminals	Nickel-plated or Tin-plated spring brass.Ear type.
Base	Phenolic laminate bakelite or glass fiber.
Specifications	
1.Insertion & Extraction Force=1 KG.Min	
2.Dielectric Strength For 60 Seconds=AC500V Min	
3. Suitable Rated Current=6.3A 250V	
4. Insulation Resistance At 500V DC= 100M ΩMin	
5. Temperature Rise=50'C Max	
6. Voltage DROP=20m V Max	

RoHS COMPLIANT	PROJ.		P/N:
SCALE:	FIT	TOLERANCE	UY-MF563
UNIT:	MM	LINEAR	ANGLE
SIZE:	A4	X. ± 1	X. ° ± 5°
REV:	A	.X ± 0.38	.X ° ± 2°
DATE:		.XX ± 0.25	.XX ° ± 1°
SHEET:	1/1	.XXX ± 0.10	
DONGGUAN TIANRUI ELECTRONICS CO.,LTD.			

El.italia srl

Via IV Novembre 72, 20019
Settimo Milanese (MI), Italy

info@elitaliaweb.it
www.elitaliaweb.it
www.contenitoriplastici.it

