


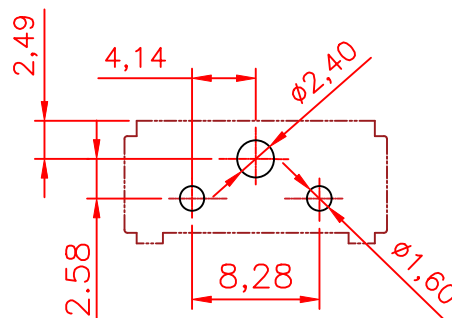


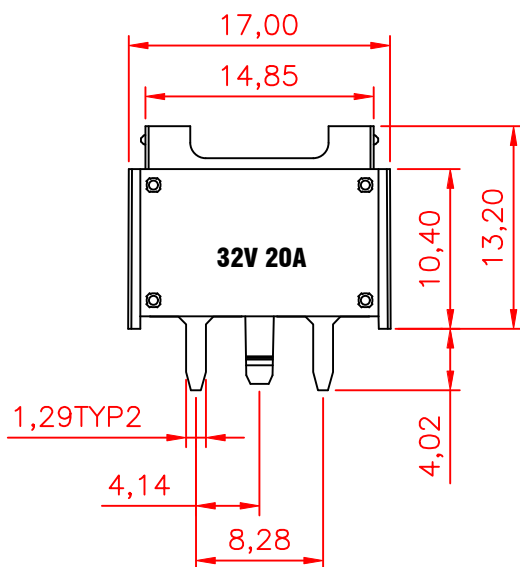

EL.ITALIA
COMPONENTI ELETTRONICI
ED ELETTROMECCANICI DAL 1981

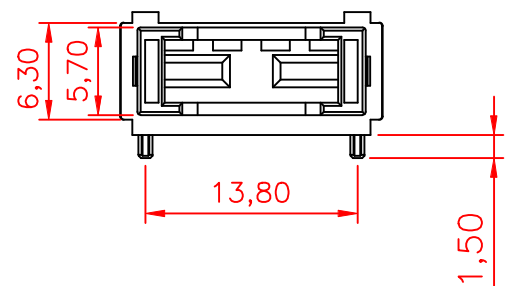

RECOMMENDED P. C. B LAYOUT
(MOUNTING SIDE)

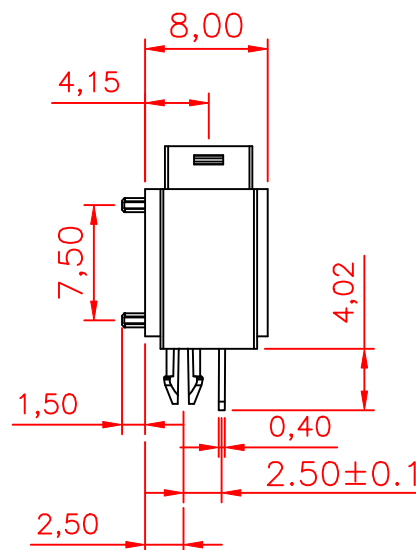

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For MINI blade fuse.
2. Electrical: Rated for current up to 20A32VAC
3. Insulating Base body: PA +30%GP
Contact: Brass with Tin plated

DONGGUAN TIANRUI ELECTRONICS CO.,LTD.

RoHS COMPLIANT		PCB Mount Fuseholder FOR MINI AUTO FUSE				CUSTOMER	
UNLESS OTHERWISE STATED							
WALL THICKNESS							
LINEAR	.XX	$\pm 0,15$ MM					
	.XXX	$\pm 0,05$ MM					
ANGULAR		$\pm 0,5$ DEG					
DRAFT ANGLE/SIDE		0.5 °MAX					
BURR & FLASH		0.10 MAX					
BREAK CORNERS		0.20 R.MAX					
PARTING LINE MISMATCH		0.05 MAX					
		DSGN	Tom	12-22-08	SCALE	free	
		DFTS	TOM	12-22-08	SHEET	1 OF 1	
		CHKD			PART NO.		REV
		APPD			UY-SL1533		A