



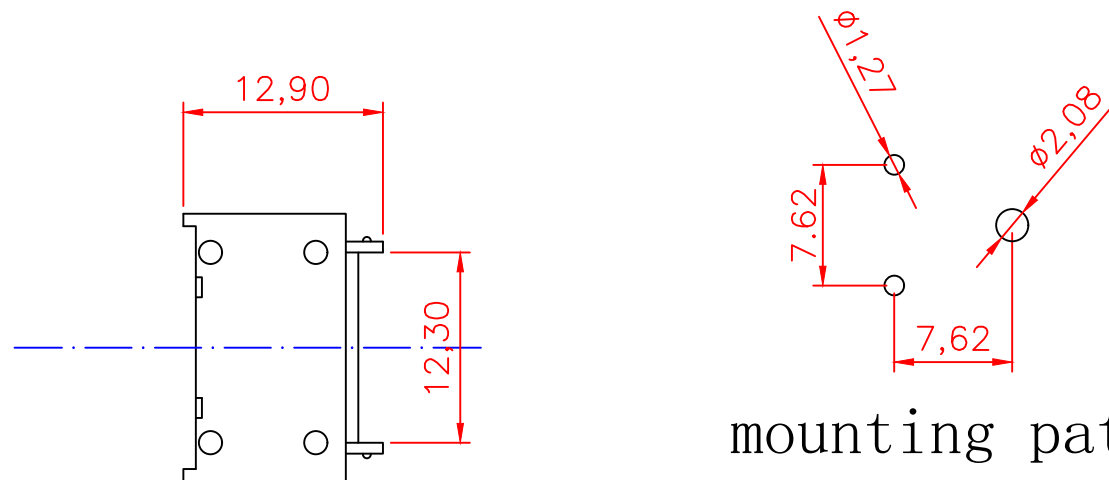

mounting pattern

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For MINI blade fuse.
2. Electrical: Rated for current up to 15A32VAC
3. Insulating Base body: PA +30%GP
Contact: Brass with Tin plated

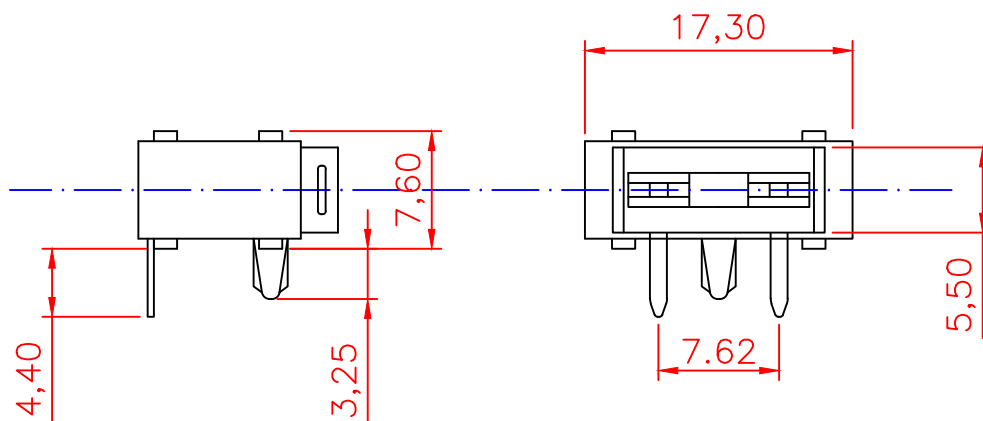

RoHS COMPLIANT		PROJ.		P/N:	UY-SL1537		El.italia srl Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy info@elitaliaweb.it www.elitaliaweb.it www.contenitoriplastici.it	
SCALE:	FIT	TOLERANCE		TITLE:	PCB MOUNT FUSE HOLDER FOR MINI AUTO FUSE			
UNIT:	MM	LINEAR	ANGLE					
SIZE:	A4	X. ± 1	X.° ± 5°					
REV:	A	.X ± 0.38	.X° ± 2°					
DATE:		.XX ± 0.25	.XX° ± 1°					
SHEET:	1/1	.XXX ± 0.10		DONGGUAN TIANRUI ELECTRONICS CO.,LTD.				