




DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-09	ORIGINAL RELEASE		

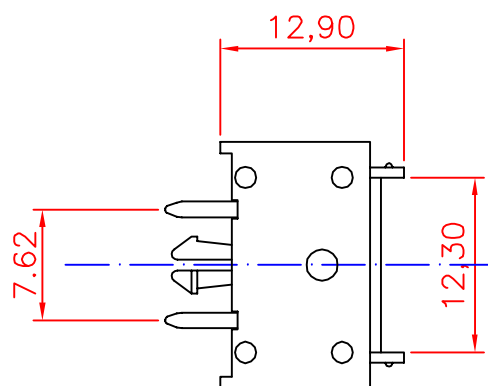

mounting pattern

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For MINI blade fuse.
2. Electrical: Rated for current up to 15A32VAC
3. Insulating Base body: PA +30%GP
Contact: Brass with Tin plated

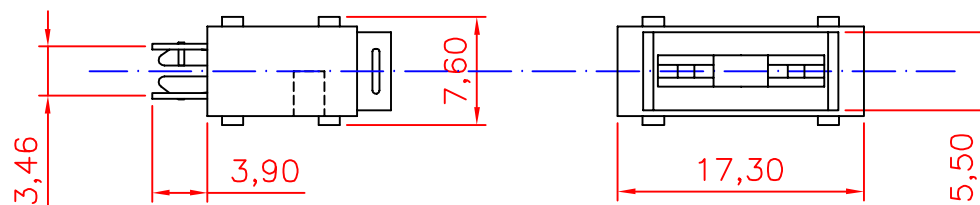

EL.ITALIA
COMPONENTI ELETTRONICI
ED ELETTROMECCANICI DAL 1981

DONGGUAN TIANRUI ELECTRONICS CO.,LTD.									
RoHS COMPLIANT			PCB Mount Fuseholder FOR MINI AUTO FUSE				CUSTOMER		
UNLESS OTHERWISE STATED									
WALL THICKNESS		MM							
LINEAR	.XX	± 0.15 MM							
	.XXX	± 0.05 MM							
ANGULAR		± 0.5 DEG							
DRAFT ANGLE/SIDE		0.5 ° MAX							
BURR & FLASH		0.10 MAX							
BREAK CORNERS		0.20 R.MAX							
PARTING LINE MISMATCH		0.05 MAX							