

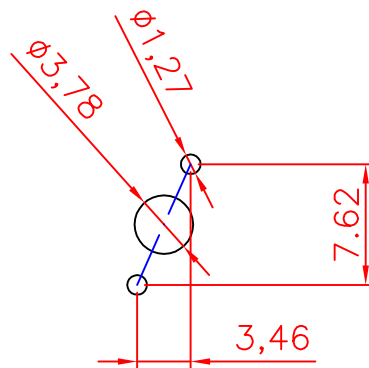


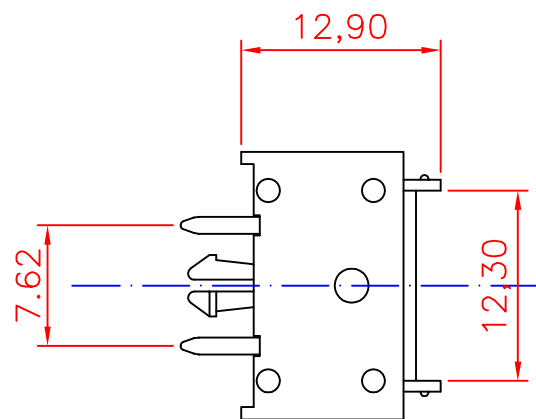

mounting pattern

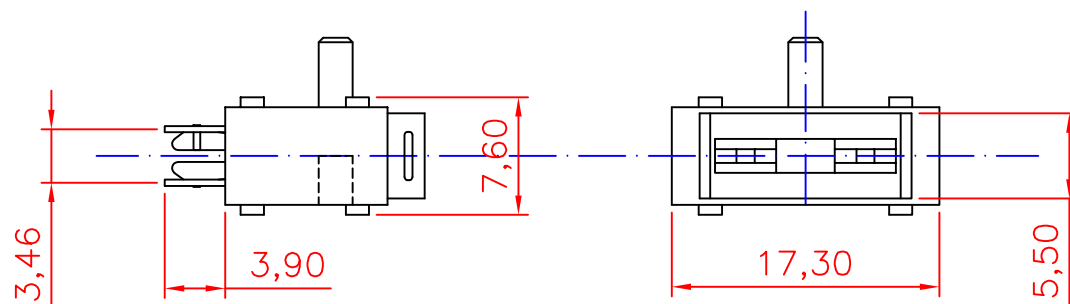

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For MINI blade fuse.
2. Electrical: Rated for current up to 15A32VAC
3. Insulating Base body: PA +30%GP
Contact: Brass with Tin plated

RoHS COMPLIANT		PROJ.		P/N:	UY-SL1539		El.italia srl		Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy	
SCALE:	FIT	TOLERANCE		TITLE:	PCB MOUNT FUSE HOLDER FOR BLADE FUSE					info@elitaliaweb.it
UNIT:	MM	LINEAR	ANGLE					www.elitaliaweb.it		
SIZE:	A4	X. ± 1	X.° ± 5°						www.contenitoriplastici.it	
REV:	A	.X ± 0.38	.X° ± 2°				DONGGUAN TIANRUI ELECTRONICS CO.,LTD.			
DATE:		.XX ± 0.25	.XX° ± 1°							
SHEET:	1/1	.XXX ± 0.10								

EL.ITALIA