


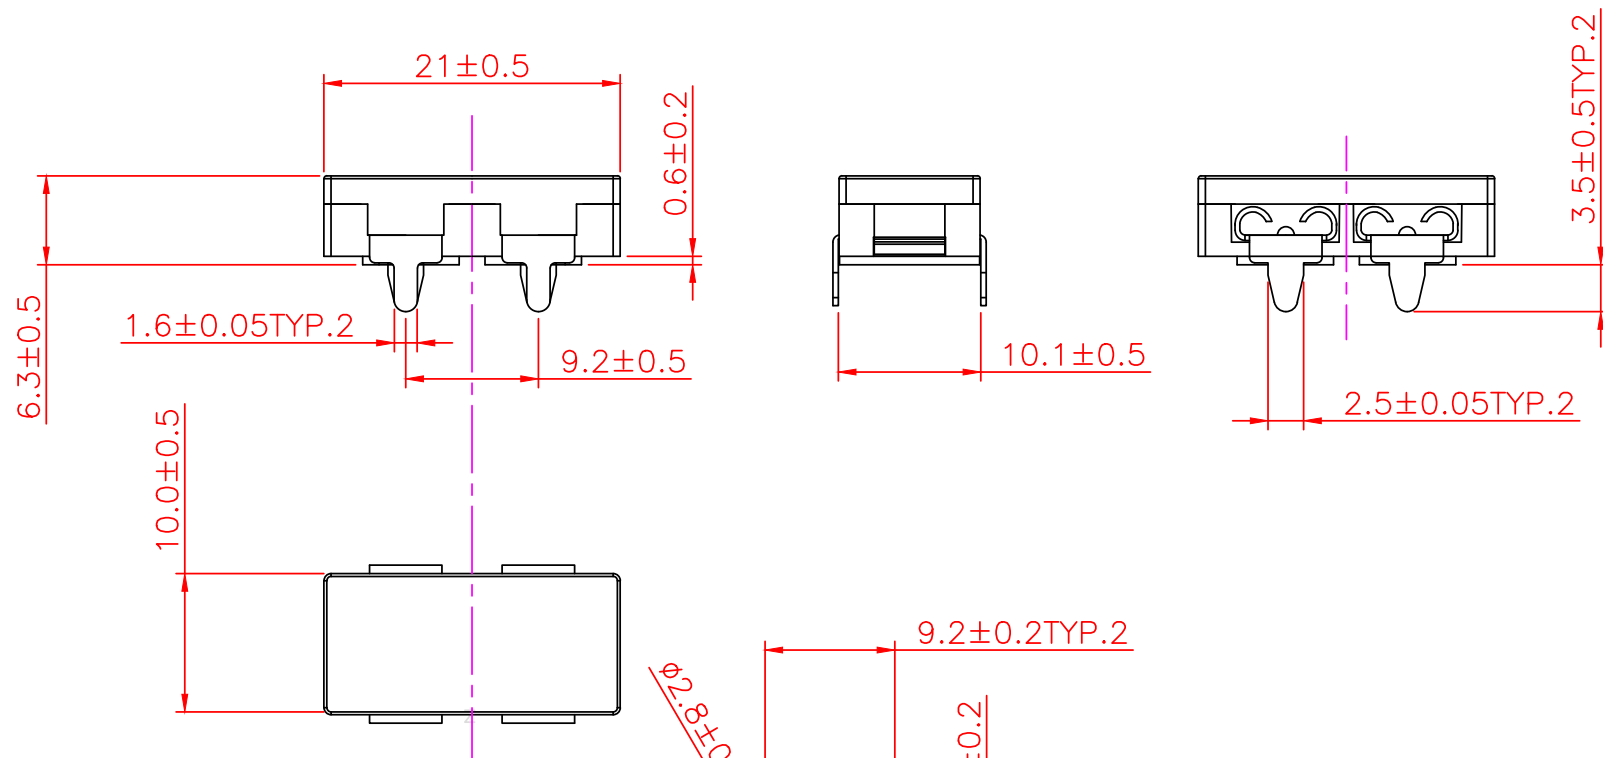

OTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass,  $T=0.3\text{mm}$ ;  
Insulator--Glass Filled PBT, 94-V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For ATO/ATC/ATN/257 automotive blade Fuses.
6. Suitable rated current: 30A@500VAC.
7. Insertion and extraction force: 1Kg Min.
8. Dielectric Strength: Min.AC1000V.
9. Contact Resistance: Max 50m $\omega$ .
10. temperature rise: 50°Max.
11. Insulation Resistance At 500V DC: 100M $\omega$

|                |     |             |           |                                       |          |  |                                                                                                                                                                                                       |  |
|----------------|-----|-------------|-----------|---------------------------------------|----------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| RoHS COMPLIANT |     | PROJ.       |           | P/N:                                  | UY-SL25A |  | <div>El.italia srl</div> <div> Via IV Novembre 72, 20019<br/>Settimo Milanese (MI), Italy</div> <div> info@elitaliaweb.it</div> <div> www.elitaliaweb.it</div> <div> www.contenitoriplastici.it</div> |  |
| SCALE:         | FIT | TOLERANCE   |           |                                       |          |  |                                                                                                                                                                                                       |  |
| UNIT:          | MM  | LINEAR      | ANGLE     | TITLE:                                |          |  |                                                                                                                                                                                                       |  |
| SIZE:          | A4  | X. ± 1      | X. ° ± 5° | PCB MOUNT FUSE HOLDER                 |          |  |                                                                                                                                                                                                       |  |
| REV:           | A   | .X ± 0.38   | .X° ± 2°  |                                       |          |  |                                                                                                                                                                                                       |  |
| DATE:          |     | .XX ± 0.25  | .XX° ± 1° |                                       |          |  |                                                                                                                                                                                                       |  |
| SHEET:         | 1/1 | .XXX ± 0.10 |           | DONGGUAN TIANRUI ELECTRONICS CO.,LTD. |          |  |                                                                                                                                                                                                       |  |