



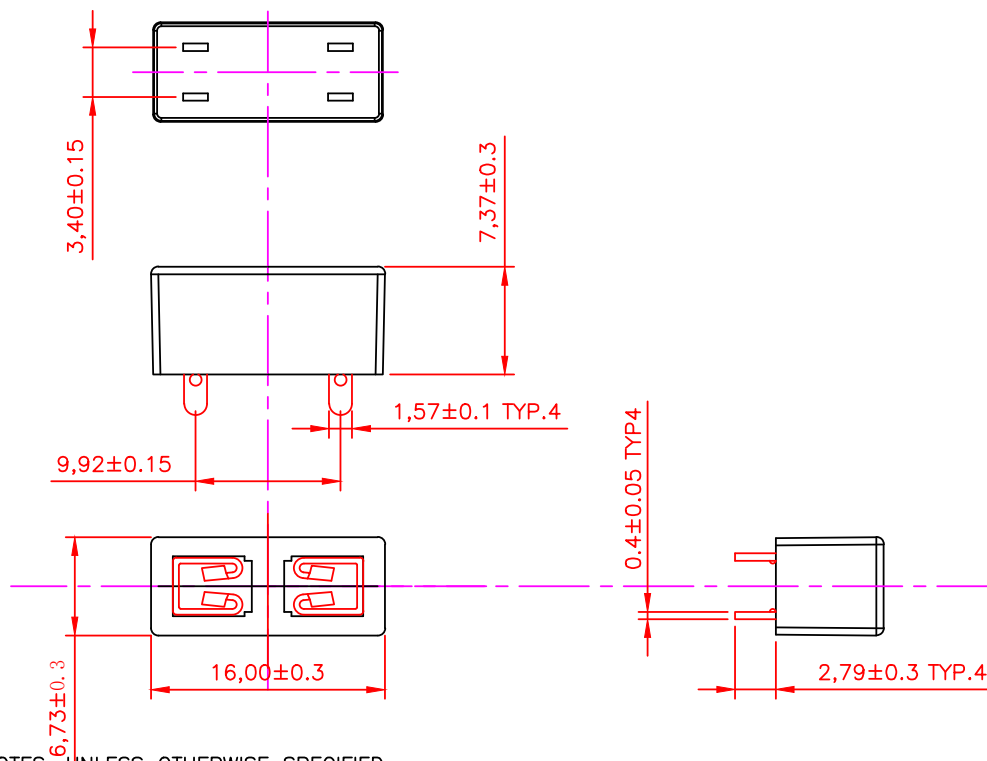

NOTES: UNLESS OTHERWISE SPECIFIED.

- material: Contacts--brass, T=0.4mm;
Insulator--HEAT RESISTANCE NYLON PA46 OR EQUIVALENT;
- terminal finish:
A: underlying----Ni plated, thickness of film >1uM;
B: surface----high temperature Tin plated, thickness of film>3uM;
C: heat resistance: above 400degree
- removed burrs and sharp edge.
- For MINI automotive blade Fuses and PC mounting.
- Suitable rated current: 30A@500VAC.
- Insertion and extraction force: 2Kg Min.

MOUNTING DETAIL

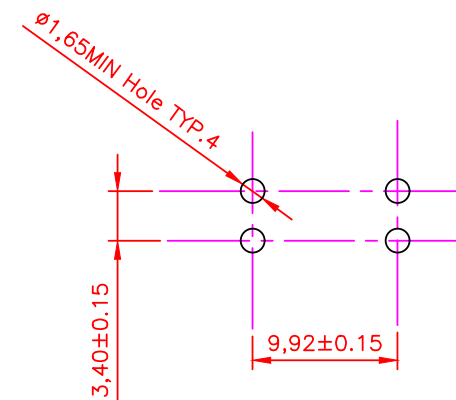

RoHS COMPLIANT		PROJ.		P/N:	UY-SL506B		El.italia srl  Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy  info@elitaliaweb.it  www.elitaliaweb.it  www.contenitoriplastici.it	 EL.ITALIA
SCALE:	FIT	TOLERANCE		TITLE:				
UNIT:	MM	LINEAR	ANGLE		PCB MOUNT FUSE HOLDER			
SIZE:	A4	X. ± 1	X. ° ± 5°			DONGGUAN TIANRUI ELECTRONICS CO.,LTD.		
REV:	A	.X ± 0.38	.X ° ± 2°					
DATE:		.XX ± 0.25	.XX ° ± 1°					
SHEET:	1/1	.XXX ± 0.10						