


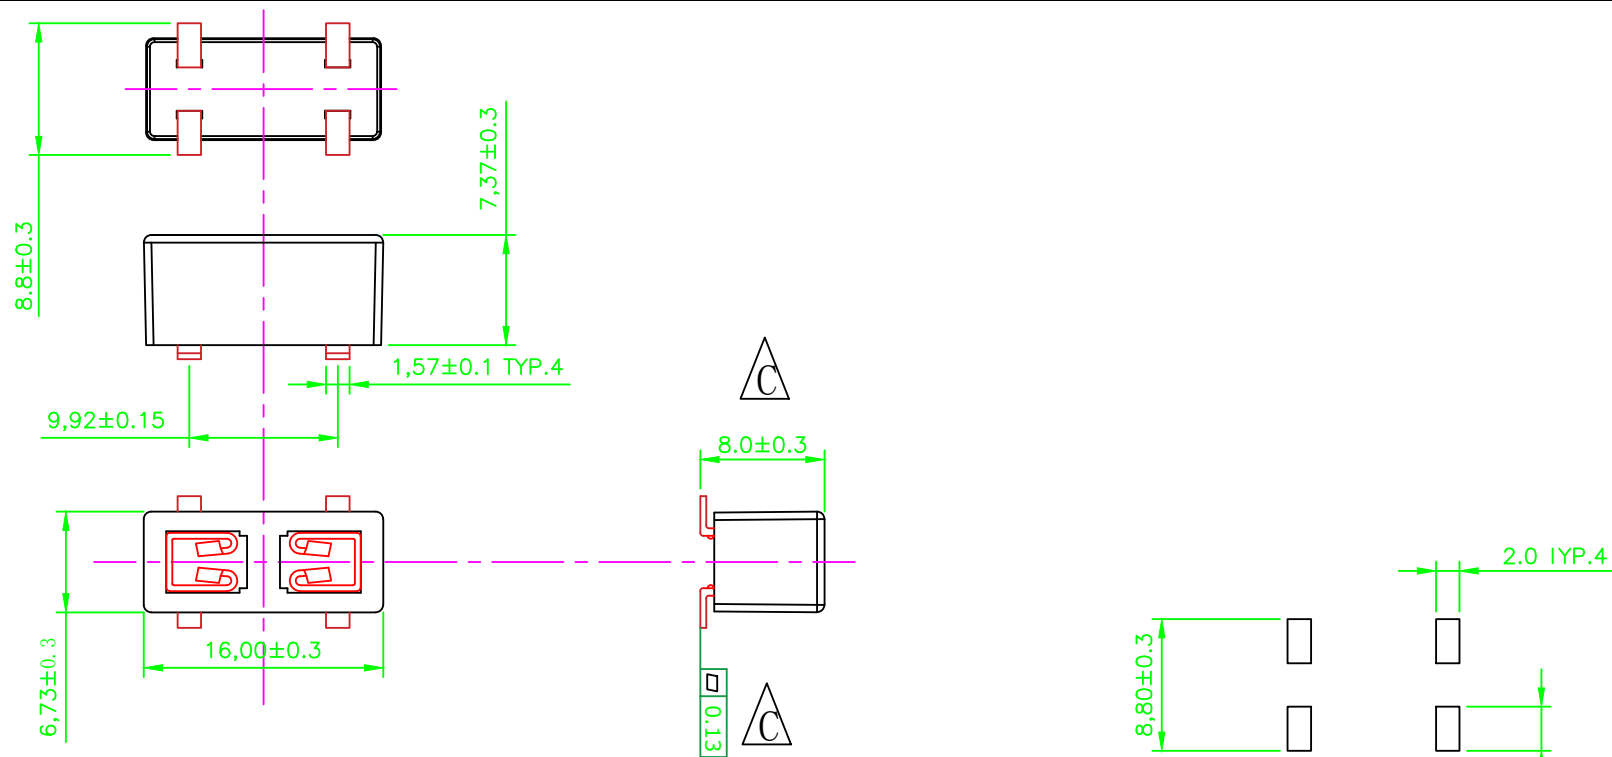

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.4mm;
Insulator--HEAT RESISTANCE NYLON PA66 94V0 OR EQUIVALENT;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For MINI / 297 autofuse / ATM series or equivalent.
5. Temperature rating: -50°C to +145°C.
6. Suitable rated current: 30A@500VAC.
7. Fully insulated clips to protect fuses against shorting.
7. Withstands shock and vibration.
7. Monting : SMT.
8. Packing: 32mm wide, 16mm pitch, 13inch reel(500PCS per reel).

MOUNTING DETAIL

RoHS COMPLIANT		PROJ.		P/N:	UY-SL506BB		El.italia srl	Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy	info@elitaliaweb.it www.elitaliaweb.it www.contenitoriplastici.it	
SCALE:	FIT	TOLERANCE		TITLE:						
UNIT:	MM	LINEAR	ANGLE	PCB MOUNT FUSE HOLDER		DONGGUAN TIANRUI ELECTRONICS CO.,LTD.				
SIZE:	A4	X. ± 1	X.° ± 5°							
REV:	A	.X ± 0.38	.X° ± 2°							
DATE:		.XX ± 0.25	.XX° ± 1°							
SHEET:	1/1	.XXX ± 0.10								