



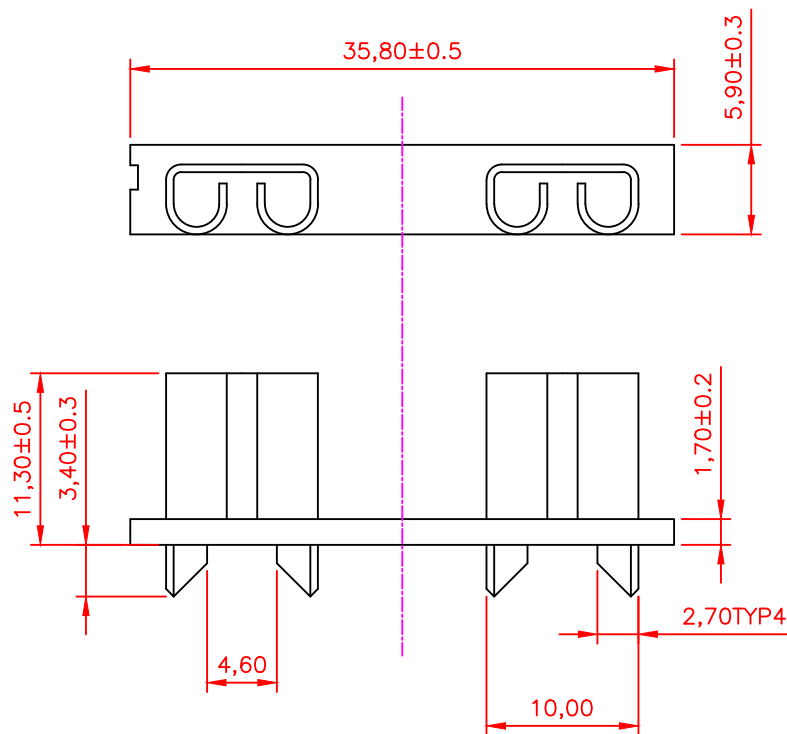

MOUNTING DETAIL FOR TWO CLIPS

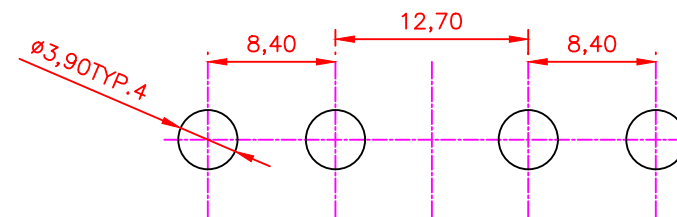

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--Copper, T=0.5mm;
Insulator-- NYLON PA+GF 94V0 OR EQUIVALENT;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For MAXI automotive blade Fuses .
5. Suitable rated current: 50A@500VAC.
5. Temperature rating: -50°C to +145°C.
6. Withstands shock and vibration.
- 7.Thru hole PC mountable, maintains position during wave soldering.
8. Holds fuse securely even after multiple insertions.

RoHS COMPLIANT		PROJ.		P/N:	UY-SL506C		El.italia srl	Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy	
SCALE:	FIT	TOLERANCE		TITLE:		PCB MOUNT FUSE HOLDER			
UNIT:	MM	LINEAR	ANGLE						
SIZE:	A4	X. ± 1	X.° ± 5°	DONGGUAN TIANRUI ELECTRONICS CO.,LTD.					
REV:	A	.X ± 0.38	.X° ± 2°						
DATE:		.XX ± 0.25	.XX° ± 1°						
SHEET:	1/1	.XXX ± 0.10				info@elitaliaweb.it	www.elitaliaweb.it	www.contenitoriplastici.it	