


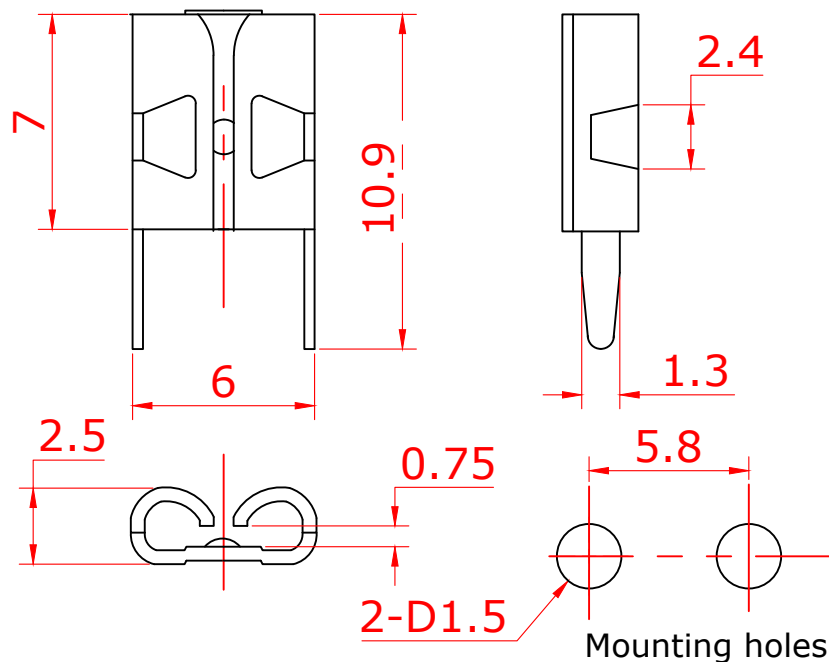

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Spring brass, T=0.35mm;
2. finish: Ni plated Or Tin plated;
3. removed burrs and sharp edge.
4. For mini blade automotive Fuses.
6. Suitable rated current: 15A.

RoHS COMPLIANT		PROJ.		P/N:	UY-SL506KA		El.italia srl	Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy
SCALE:	FIT	TOLERANCE		TITLE:	PCB MOUNT FUSE HOLDER			
UNIT:	MM	LINEAR	ANGLE					
SIZE:	A4	X. ± 1	X.° ± 5°					
REV:	A	.X ± 0.38	.X° ± 2°					
DATE:		.XX ± 0.25	.XX° ± 1°					
SHEET:	1/1	.XXX ± 0.10		DONGGUAN TIANRUI ELECTRONICS CO.,LTD.				