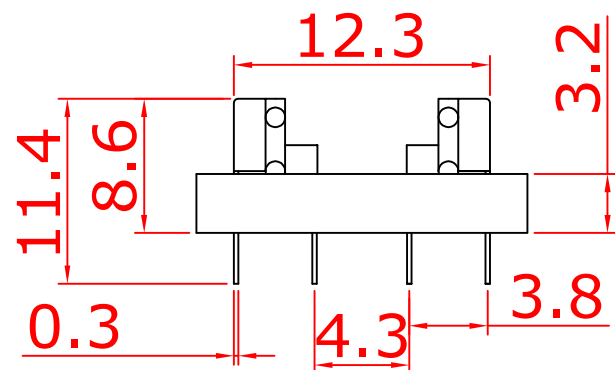
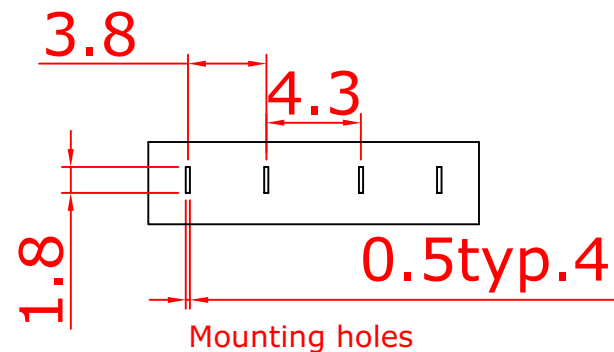


NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.30mm;
Insulator--Glass Filled PBT, 94-V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For Low profile mini blade Fuses 891/BFLP.
6. Suitable rated current: 15A@250VAC.
7. Insertion and extraction force: 1Kg Min.
8. Dielectric Strength: Min.AC500V.
9. Contact Resistance: Max 50m ω .
10. temperature rise: 50°Max.
11. Insulation Resistance At 500V DC: 100M ω

RoHS COMPLIANT		PROJ.		P/N:	UY-SL506PB		El.italia srl  Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy	 EL.ITALIA
SCALE:	FIT	TOLERANCE		TITLE:				
UNIT:	MM	LINEAR	ANGLE		PCB MOUNT FUSE HOLDER	 info@elitaliaweb.it		
SIZE:	A4	X. ± 1	X.° ± 5°	DONGGUAN TIANRUI ELECTRONICS CO.,LTD.		 www.elitaliaweb.it		
REV:	A	.X ± 0.38	.X° ± 2°		 www.contenitoriplastici.it			
DATE:		.XX ± 0.25	.XX° ± 1°					
SHEET:	1/1	.XXX ± 0.10						