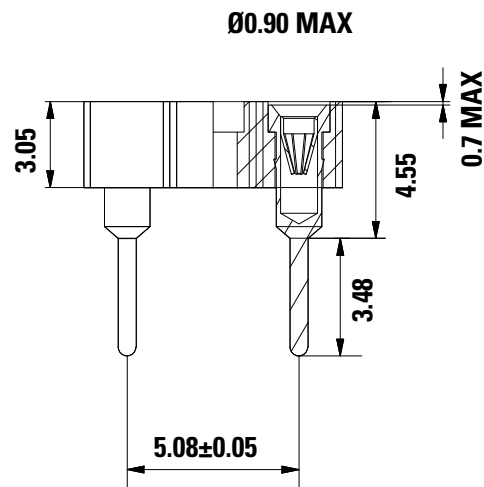



562 Series	
TR5	
Compatible Fuses	
Materials	Block: Black Thermoplastic, UL94 V-0 PET Terminals: Copper alloy; solderable tinned
Electrical Data (23°C)	Rated Voltage: 250V Max. Current/Power: 6.3A/1.6W
Mounting	PC Board, 5.08mm pin spacing
Minimum Cross Section	Conducting path - 0.1mm ²
Unit Weight	0.12g
Ambient Temperature	- 4 °C to + 85°C

RoHS COMPLIANT		PROJ.		P/N:	UY-SL562		El.italia srl  Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy  info@elitaliaweb.it  www.elitaliaweb.it  www.contenitoriplastici.it  EL.ITALIA
SCALE:	FIT	TOLERANCE		TITLE:	PCB MOUNT FUSE HOLDER		
UNIT:	MM	LINEAR	ANGLE				
SIZE:	A4	X. ± 1	X.° ± 5°				
REV:	A	.X ± 0.38	.X° ± 2°				
DATE:		.XX ± 0.25	.XX° ± 1°				
SHEET:	1/1	.XXX ± 0.10		DONGGUAN TIANRUI ELECTRONICS CO.,LTD.			