
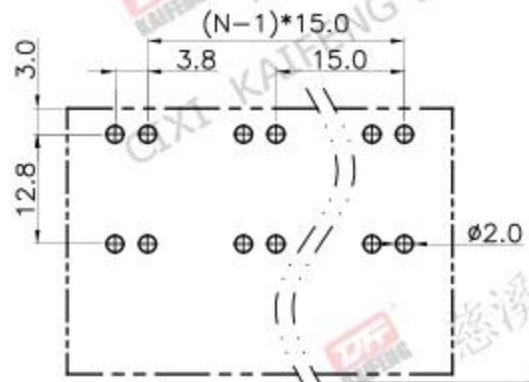
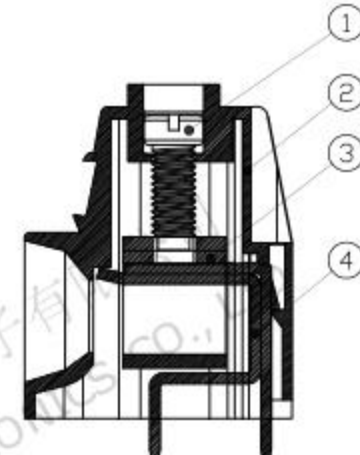
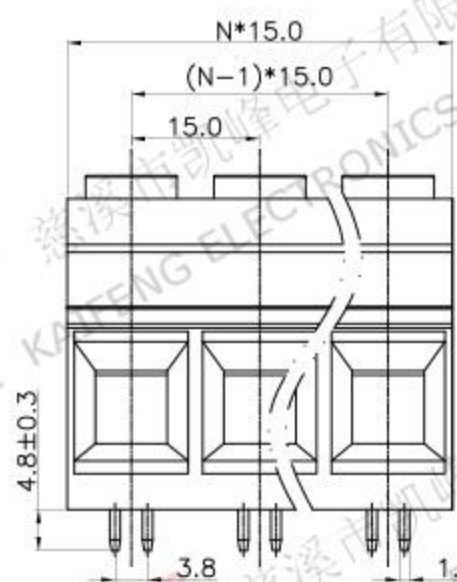
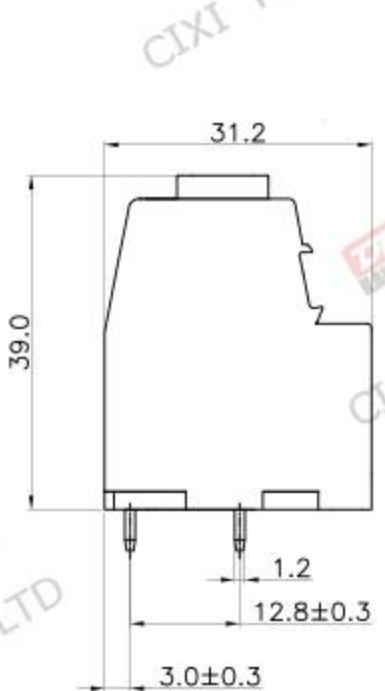


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.22	DENG	JIN

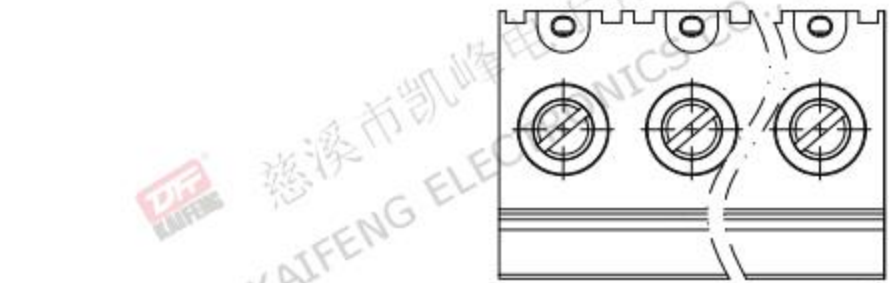

- Material
 - ①Screws : M5.0 steel, Zinc plated, - slot type
 - ②Housing : PA66, UL94V-0
 - ③Clamp : Steel, Zinc plated
 - ④Pin header : Copper alloy, Tin plated
- Electrical

	UL	IEC
Rated voltage :	600V	1000V
Rated current :	115A	125A
Contact Resistance:	20mΩ	
Insulation resistance:	500MΩ/DC500V	
Withstanding Voltage :	AC3500V/1min	
Wire range:	20-2AWG	35.0mm ²
- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ± 5/5sec
 - Torque: 2.0N.m (20.40Lb.in)
 - Strip length: 15-18mm
- RoHS compliance

HOW TO ORDER
 KF137-15.0-XXP-1 X-XXXXX

MODEL Pitch:mm

No.of poles: 2~24P

Customer Request

Color:
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray

1:Single Pitch
 2:Double Pitch

Pitch range	Nominal dimension range	PROJECTION	TITLE
>0 ~ 6	>0 ~ 30	0.1/10	KF137-15.0-XXP-1X
>6 ~ 10	>30 ~ 60	<	
>10 ~ 24	>60 ~ 100		UNIT mm
>24 ~ 30	>100 ~ 150		
±0.15	±0.20		SHEET SIZE A4
±0.20	±0.30		SERIES KF137
±0.30	±0.50		
±0.50	±0.70		
±0.70	±1.00		
±1.00	±1.30		
±1.30	±2*		

DRAWING TYPE	CUSTOMER DRAWING		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W15000812		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD