




REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN




P.C.B.LAYOUT

- Material
  - ⊙Housing : PA66, UL94V-0
  - ⊙Pin header : Copper alloy, Tin plated
  - ⊙Nut : M2.5,Copper alloy
- Electrical
  - UL IEC
  - Rated voltage : 300V 320V
  - Rated current : 15A 20A
  - Contact resistance : 20mΩ(Max)
  - Insulation resistance : 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
- Mechanical
  - Operating temperature: -40℃ ~ +105℃
  - Soldering temperature: 250℃ ±5/5sec
- RoHS compliance

HOW TO ORDER

KF2EDGRM-X-5.0-XXP-1 X-XXXXX



Pitch range

Nominal dimension range

PROJECTION

UNIT

SHEET SIZE

TITLE





SCALE

DRAWING NO.

>0	>6	>10	>0	>30	>60	>100	>150	6.1/10	mm	KF2EDGRM-X-5.0-XXP-1X
6	10	24	30	60	100	150	≥	A4	SERIES	KF2EDGRM-X
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2		
DRAWING TYPE		CUSTOMER DRAWING								
SCALE		1:1 SHEET 1 OF 1								
DRAWING NO.		W10001622								

**DF** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO.,LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN




P.C.B.LAYOUT

- Material  
 ØHousing : PA66, UL94V-0  
 ØPin header : Copper alloy, Tin plated  
 ØNut : M2.5,Copper alloy
- Electrical UL IEC  
 Rated voltage : 300V 320V  
 Rated current : 15A 20A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance : 500MΩ/DC500V  
 Withstanding Voltage : AC2000V/1min
- Mechanical  
 Operating temperature: -40℃~+105℃  
 Soldering temperature: 250℃±5/5sec
- RoHS compliance

HOW TO ORDER

KF2EDGRM-X-5.08-XXP-1 X-XXXXX






Pitch range	Nominal dimension range	PROJECTION
>0	>6	>10
6	10	24
10	24	30
15	30	60
20	30	100
30	30	150
40	30	150
50	30	150
70	30	150
100	30	150
150	30	150
±2		

UNIT	TITLE
mm	KF2EDGRM-X-5.08-XXP-1X
SHEET SIZE	SERIES
A4	KF2EDGRM-X

SCALE	CUSTOMER DRAWING
1:1	
DRAWING NO.	SHEET
W10001642	1 OF 1

**DF** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO.,LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN



• Material  
 ØHousing : PA66, UL94V-0  
 ØPin header : Copper alloy, Tin plated  
 ØNut : M2.5, Copper alloy

• Electrical UL IEC  
 Rated voltage : 300V 250V  
 Rated current : 8A 7A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance : 500MΩ/DC500V  
 Withstanding Voltage : AC1500V/1min

• Mechanical  
 Operating temperature : -40°C ~ +105°C  
 Soldering temperature : 250°C ± 5/5sec

• RoHS compliance

#### HOW TO ORDER


KF2EDGRM-X-3.5-XXP-1 X-XXXXX



Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE							
>0	>0	6.1/10	mm	KF2EDGRM-Y-3.5-XXP-1X							
≤0	≤0	≤	mm	KF2EDGRM-Y							
8	10	24	30	60	100	150	≥150	SHEET SIZE	A4	SERIES	KF2EDGRM-Y
DRAWING TYPE		CUSTOMER DRAWING									
SCALE		1:1 SHEET 1 OF 1									
DRAWING NO.		W10000722									

**DF** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO., LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

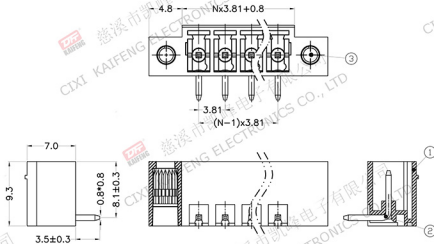

- Material
  - ØHousing : PA66, UL94V-0
  - ØPin header : Copper alloy, Tin plated
  - ØNut : M2.5, Copper alloy
- Electrical
  - UL IEC
  - Rated voltage : 300V 250V
  - Rated current : 8A 7A
  - Contact resistance : 20mΩ(Max)
  - Insulation resistance : 500MΩ/DC500V
  - Withstanding Voltage : AC1500V/1min
- Mechanical
  - Operating temperature: -40°C ~ +105°C
  - Soldering temperature: 250°C ± 5/5sec
- RoHS compliance

#### HOW TO ORDER

KF2EDGRM-Y-3.81-XXP-1 X-XXXXX





P.C.B.LAYOUT

Pitch range		Nominal dimension range		PROJECTION	TITLE						
>0	>6	>10	>0	>30	>60	>100	>150	0.1/10	UNIT	mm	KF2EDGRM-Y-3.81-XXP-1X
6	10	24	30	60	100	150	150	<	SHEET SIZE	A4	SERIES KF2EDGRM-Y
±0.15		±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2		
DRAWING TYPE		CUSTOMER DRAWING									
SCALE		1:1 SHEET 1 OF 1									
DRAWING NO.		W10000752									



慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO., LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

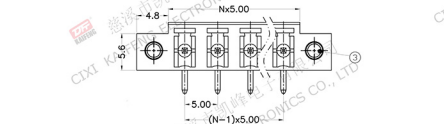

P.C.B. LAYOUT

- Material
  - ⊙Housing : PA66, UL94V-0
  - ⊙Pin header : Copper alloy, Tin plated
  - ⊙Nut : M2.5, Copper alloy
- Electrical
  - UL IEC
  - Rated voltage : 300V 320V
  - Rated current : 8A 7A
  - Contact resistance : 20mΩ(Max)
  - Insulation resistance: 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
- Mechanical
  - Operating temperature: -40℃ ~ +105℃
  - Soldering temperature: 250℃ ± 5/5sec
- RoHS compliance

HOW TO ORDER



KF2EDGRM-Y-5.0-XXP-1 X-XXXXX



Pitch range		Nominal dimension range				PROJECTION	UNIT	TITLE
>0	>6	>10	>0	>30	>60	>100	0.1/10	KF2EDGRM-Y-5.0-XXP-1X
6	10	24	30	60	100	150	<	SHEET SIZE A4
±0.15(±0.20)		±0.30	±0.50	±0.70	±1.00	±1.30	±2	SERIES KF2EDGRM-Y
DRAWING TYPE		CUSTOMER DRAWING						
SCALE		1:1 SHEET 1 OF 1						
DRAWING NO.		W10000782						

**DF** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO., LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN




P.C.B. LAYOUT

- Material  
 ⌀Housing : PA66, UL94V-0  
 ⌀Pin header : Copper alloy, Tin plated  
 ⌀Nut : M2.5, Copper alloy
- Electrical  
 UL IEC  
 Rated voltage : 300V 320V  
 Rated current : 8A 7A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance : 500MΩ/DC500V  
 Withstanding Voltage : AC2000V/1min
- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec
- RoHS compliance

HOW TO ORDER

KF2EDGRM-Y-5.08-XXP-1 X-XXXXX



Pitch range	Nominal dimension range	PROJECTION	TITLE
>0	>0	6.1/10	KF2EDGRM-Y-5.08-XXP-1X
6	60	<	SHEET SIZE A4
±0.15	±0.30	±2	SERIES KF2EDGRM-Y
DRAWING TYPE CUSTOMER DRAWING		慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO.,LTD	
SCALE	1:1 SHEET 1 OF 1		
DRAWING NO.	W10000802		