




REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN



P.C.B. LAYOUT

- Material
 - ØHousing : PA66, UL94V-0
 - ØPin header : Copper alloy, Ag plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 320V
 - Rated current : 15A 20A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
- Mechanical
 - Operating temperature: -40℃~+105℃
 - Soldering temperature: 250℃±5/5sec
- RoHS compliance

HOW TO ORDER

KF2EFR-5.0-XXP-1 X-XXXX







Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	0.1/10	mm	KF2EFR-5.0-XXP-1X
>6	>60	<	SHEET SIZE	A4
>10	>100	±2	SCALE	1:1
>24	>240	±2	DRAWING NO.	W10001892

UNIT	TITLE
mm	KF2EFR-5.0-XXP-1X
SHEET SIZE	SERIES
A4	KF2EFR



慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO., LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN



P.C.B. LAYOUT

Pitch range		Nominal dimension range				PROJECTION	UNIT	TITLE	
>0	>6	>10	>0	>30	>60	>100	0.1/10	KF2EFR-5.08-XXP-1X	
6	10	24	30	60	100	150	≤	SHEET SIZE A4	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2	
DRAWING TYPE		CUSTOMER DRAWING				慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO.,LTD			
SCALE		1:1							
DRAWING NO.		W10001852							


- Material
 - ØHousing : PA66, UL94V-0
 - ØPin header : Copper alloy, Ag plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 320V
 - Rated current : 15A 20A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
- Mechanical
 - Operating temperature: -40℃~+105℃
 - Soldering temperature: 250℃±5/5sec
- RoHS compliance

HOW TO ORDER

KF2EFR-5.08-XXP-1 X-XXXX



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN

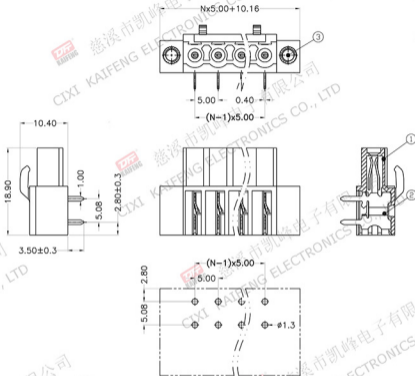

- Material
 - ①Housing : PA66, UL94V-0
 - ②Pin header :Copper alloy, Ag plated
 - ③Nut : M2.5,Brass
- Electrical
 - UL IEC
 - Rated voltage : 300V 320V
 - Rated current : 15A 20A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
- Mechanical
 - Operating temperature: -40°C ~ $+105^{\circ}\text{C}$
 - Soldering temperature: $250^{\circ}\text{C} \pm 5/5\text{sec}$
- RoHS compliance

HOW TO ORDER
KF2EFRM-5.0-XXP-1 X-XXXXX








P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>30	0.1/10	mm	KF2EFRM-5.0-XXP-1X
>6	>60	<	A4	SERIES KF2EFRM
8	100	±2		
±0.15	±0.30	CUSTOMER DRAWING		
SCALE	1:1	SHEET 1 OF 1		
DRAWING NO.	W10001912			




慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN



P.C.B.LAYOUT

- Material
 - ØHousing : PA66, UL94V-0
 - ØPin header : Copper alloy, Ag plated
 - ØNut : M2.5, Brass
- Electrical
 - UL IEC
 - Rated voltage : 300V 320V
 - Rated current : 15A 20A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
- Mechanical
 - Operating temperature : -40℃~+105℃
 - Soldering temperature : 250℃±5/5sec
- RoHS compliance



Pitch range	Nominal dimension range	PROJECTION	TITLE
>0	>30	0.1/10	KF2EFRM-5.08-XXP-1X
>6	>60	<	SHEET SIZE A4
>10	>100		SERIES KF2EFRM
>24	>150		
±0.15	±0.30		
±0.20	±0.50		
±0.30	±0.70		
±0.50	±1.00		
±1.00	±1.30		
±2			
DRAWING NO. W10001872		慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO.,LTD	