

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.18	DENG	JIN

- Material
- ⑥Screws : M2.0 steel, Zinc plated,
"-" slot type
- ⑦Housing : PA66, UL94V-0
- ⑧Reed : Copper alloy, Ni plated
- ⑨Pin header : Copper alloy, Tin plated






- Electrical
- UL IEC
- Rated voltage : 300V 130V
- Rated current : 7A 10A
- Contact resistance : 20mΩ(Max)
- Insulation resistance : 500MΩ/DC500V
- Withstanding Voltage : AC1250V/1min
- Wire range : 24-18AWG 1.0mm²

- Mechanical
- Operating temperature: -40℃~+105℃
- Soldering temperature: 250℃±5/5Sec
- Torque : 0.2N.m (1.77Lb.in)
- Strip length : 5-6mm

- RoHS compliance

HOW TO ORDER

KF350 R -3.5-XXP-1 X-XXXX




P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE					
>0	>6	>10	>30	>60	>100	6.1/10	mm	KF350R-3.5-XXP-1X	
6	10	24	30	60	100	150	<	SHEET SIZE A4	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2	
DRAWING TYPE		CUSTOMER DRAWING		DRAWING NO.		W15000242		1 OF 1	
SCALE		1:1		SHEET		1 OF 1			



慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO., LTD

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.18	DENG	JIN

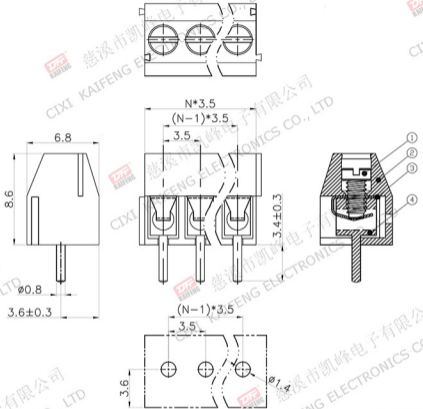

- Material
- Screws : M2.0 steel, Zinc plated, *-* slot type
- Housing : PA66, UL94V-0
- Reed : Copper alloy, Ni plated
- Pin header : Copper alloy, Tin plated


- Electrical
 - UL IEC
 - Rated voltage : 300V 130V
 - Rated current : 7A 10A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC1250V/1min
 - Wire range : 24-18AWG 1.0mm²

- Mechanical
 - Operating temperature: -40℃~+105℃
 - Soldering temperature: 250℃±5/5sec
 - Torque : 0.2N.m (1.77Lb.in)
 - Strip length: 5-6mm

- RoHS compliance

HOW TO ORDER

KF350 V -3.5-XXP-1 X-XXXX



P.C.B. LAYOUT

Pitch range	Nominal dimension range	PROJECTION	TITLE
>0	>0	0.1/10	KF350V-3.5-XXP-1X
6	60	<	SHEET SIZE A4
15	150		SERIES KF350
DRAWING TYPE CUSTOMER DRAWING		慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO.,LTD	
SCALE 1:1	SHEET 1 OF 1		
DRAWING NO. W15000232			