


Micro D-Sub Molded Cable

- Connector series: Micro D-sub
 - Gender: Female
 - Locking type: Fix screw
 - Mounting type: Straight
 - Part No.: DBW15FS-XXXXXX
- X refers to cable specification

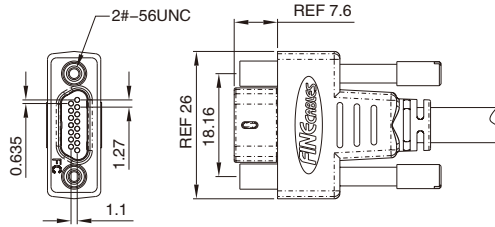


RoHS

General information

Ambient temperature:	-20°C ~ +80°C
Connector insert:	PBT
Connector contacts:	Brass gold plated
Connector nut/screw:	Brass nickel plated

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Available

Electrical data & Mechanical data

Contacts	Rated current	Voltage		Wire gauge / size		Cable jacket	Part No.
		A/C	D/C	AWG	mm ²		
Micro D-sub  15P	1A	350V	350V	26~28	0.08~0.15	PUR/PVC	DBW15FS-XXXB15

Note: X refers to cable specification

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 449 for products' part number encoding rule.