


M12 Plastic Multi-Way 4T-Splitter, Male-3*Female

- Connector series: M12
- Gender: Male&Female
- Coding: A,B,D
- Locking type: Plastic fix screw
- Mounting type: T type
- Part No.: M4TP-*XX

* refers to coding type
XX refers to pins number

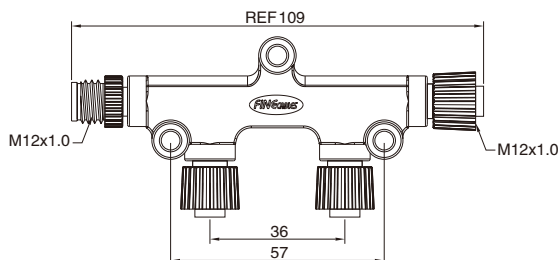

General information



| | |
|----------------------|------------------------|
| Standard: | IEC 61076-2-101 |
| Ambient temperature: | -20°C ~ + 80°C |
| Connector insert: | TPU; PA |
| Connector contacts: | Brass with gold plated |
| Connector nut/screw: | PA+GF |
| Connector overmold: | TPU |
| Seal/O-ring: | FKM |

| | |
|------------------------|--------------------------|
| Insulation resistance: | ≥ 100MΩ |
| Contact resistance : | ≤ 5mΩ |
| Shielding: | Unavailable |
| IP rating: | IP68 in locked condition |
| Mating endurance: | >500 cycles |

Electrical data & Mechanical data

| Contacts | Available Coding | | | Rated current | Voltage | | Part No. |
|----------|------------------------|------------------------|------------------------|---------------|---------|------|----------------------------------|
| | A | B | D | | A/C | D/C | |
| 03 pins | Male Female | Male Female | | 4A | 250V | 250V | M4TP-A03 M4TP-B03 |
| 04 pins | Male Female | Male Female | Male Female | 4A | 250V | 250V | M4TP-A04 M4TP-B04 M4TP-D04 |
| 05 pins | Male Female | Male Female | | 4A | 60V | 60V | M4TP-A05 M4TP-B05 |
| 08 pins | Male Female | | | 2A | 30V | 30V | M4TP-A08 |