


M12 Female Panel Mount, Solder, Front fastened

- Connector series: M12
- Gender: Female
- Coding: A,B,C,D
- Locking type: Fix screw
- Mounting type: Front fastened
- Part No.: MB12FS*FF**ST-X

* refers to coding type
 ** refers to pins number
 X refers to Chassis-side thread size

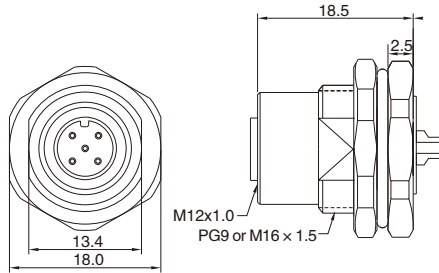

General information

Standard:	IEC 61076-2-101
Ambient temperature:	-20°C ~ +90°C
Connector insert:	PA+GF
Connector contacts:	Brass with gold plated
Connector nut/screw:	Brass with nickel plated
Seal / O-ring:	Epoxy resin / FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP68 in locked condition
Panel cut-out:	Refer to page 287
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts	Available Coding				Contacts termination	Rated current	Voltage		Wire gauge / size		Part No.
	A	B	C	D			A/C	D/C	AWG	mm ²	
03 pins					Solder version	4A	250V	250V	22AWG	0.34	MB12FSAFF03ST-X MB12FSBFF03ST-X MB12FSCFF03ST-X
04 pins					Solder version	4A	250V	250V	22AWG	0.34	MB12FSAFF04ST-X MB12FSBFF04ST-X MB12FSCFF04ST-X MB12FSDFF04ST-X
05 pins					Solder version	4A 2A (C-code)	60V	60V	22AWG 24AWG (C-code)	0.34 0.25 (C-code)	MB12FSAFF05ST-X MB12FSBFF05ST-X MB12FSCFF05ST-X
06 pins					Solder version	2A	30V	30V	24AWG	0.25	MB12FSCFF06ST-X
08 pins					Solder version	2A	30V	30V	24AWG	0.25	MB12FSAFF08ST-X
12 pins					Solder version	1.5A	30V	30V	26AWG	0.14	MB12FSAFF12ST-X
17 pins					Solder version	1.5A	30V	30V	26AWG	0.14	MB12FSAFF17ST-X

Note: X refers to Chassis-side thread size

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 96 for products' part number encoding rule.