


M12 Female Panel Mount, Solder, Rear fastened, Adjustable Nut

- Connector series: M12
- Gender: Female
- Coding: A,B,C,D
- Locking type: Fix screw
- Mounting type: Rear fastened
- Part No.: MB12FS*RF**ST-X(Adjustable)

* refers to coding type
 ** refers to pins number
 X refers to Chassis-side thread size

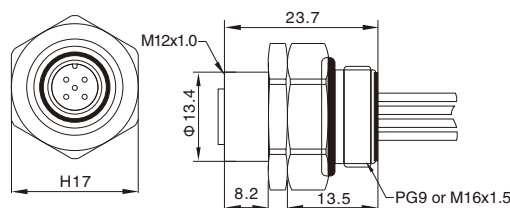

General information

Standard:	IEC 61076-2-101
Ambient temperature:	-20°C ~ +90°C
Connector insert:	PA+GF
Connector contacts:	Brass with gold plated
Connector nut/screw:	Brass with nickel plated
Seal / O-ring:	Epoxy resin / FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP68 in locked condition
Panel cut-out:	Refer to page 287
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts	Available Coding				Contacts termination	Rated current	Voltage		Wire gauge / size		Part No.
	A	B	C	D			A/C	D/C	AWG	mm ²	
03 pins					Solder version	4A	250V	250V	22AWG	0.34	MB12FSARF03ST-X(adj) MB12FSBRF03ST-X(adj) MB12FSCRF03ST-X(adj)
04 pins					Solder version	4A	250V	250V	22AWG	0.34	MB12FSARF04ST-X(adj) MB12FSBRF04ST-X(adj) MB12FSCRF04ST-X(adj) MB12FSDRF04ST-X(adj)
05 pins					Solder version	4A 2A (C-code)	60V	60V	22AWG 24AWG (C-code)	0.34 0.25 (C-code)	MB12FSARF05ST-X(adj) MB12FSBRF05ST-X(adj) MB12FSCRF05ST-X(adj)
06 pins					Solder version	2A	30V	30V	24AWG	0.25	MB12FSCRF06ST-X(adj)
08 pins					Solder version	2A	30V	30V	24AWG	0.25	MB12FSARF08ST-X(adj)
12 pins					Solder version	1.5A	30V	30V	26AWG	0.14	MB12FSARF12ST-X(adj)
17 pins					Solder version	1.5A	30V	30V	26AWG	0.14	MB12FSARF17ST-X(adj)

Note: X refers to Chassis-side thread size

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 96 for products' part number encoding rule.