


## M12 Male Field Wirable Assembly, Straight, Piercing, X-coding, Shielded

- Connector series: M12
- Gender: Male
- Coding: X
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: MB12MPSXFF08ST



### General information

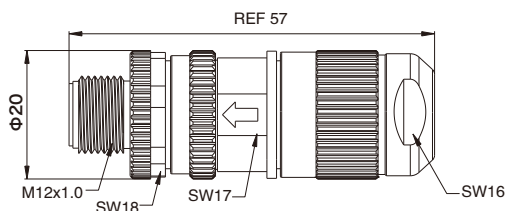

Standard:	IEC 61076-2-101
Ambient temperature:	-25°C ~ +90°C
Connector insert:	PA
Connector contacts:	Brass with gold plated
Connector nut/screw:	Brass/Zinc with nickel plated
Connector body:	Zinc alloy with nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 10mΩ
Shielding:	Available
Suitable cable Dia:	5.5~9.0mm
IP rating:	IP68 in locked condition
Transmission characteristic:	CAT 6 <sub>A</sub> /CAT 7
Mating endurance:	>500 cycles

### Electrical data & Mechanical data

Contacts	Contacts termination	Rated current	Voltage		Wire gauge / size		Cable spec	Part No.	
			A/C	D/C	AWG	mm <sup>2</sup>			
08 pins		Piercing	0.5A	50V	60V	27~24	0.14~0.34	CAT 6A/CAT 7	MB12MPSXFF08ST

### Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm<sup>2</sup>.
- Please refer to Page 96 for products' part number encoding rule.