



## **M5 Female Molded Cable, Angled**

• Connector series: M5

• Gender: Female


• Coding: A

• Locking type: Fix screw

• Mounting type: Right angled

• Part No.: MA05FAF\*\*RAXXXX14

\*\*refers to pins number
X refers to cable specification

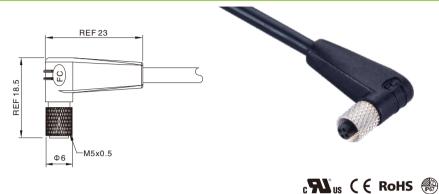

## ■ General information

IEC 61076-2-105			
-40°C ~ +80°C(fixed installation)			
-20°C ~ +80°C(flexible installation)			
TPU			
Brass with gold plated			
TPU			
Brass with nickel plated			
FKM			

Insulation resistance:	≥100MΩ
Contact resistance:	≤5mΩ
Shielding:	Unavailable
IP rating:	IP67 in locked condition
Mating endurance:	>500 cycles

## ■ Electrical data & Mechanical data

Contacts		Rated	Voltage		Wire gauge / size		Cable jacket	Part No.
		current	A/C	D/C	AWG	mm²	Cable Jacket	Part NO.
03 pins	ins 1A	A 60V 60V	60V	26AWG	0.14	PVC	MA05FAF03RA <u>XX</u> CB14	
	40 03	0 03 1A 00V 00V 20AVVG	ZUAVVG	0.14	PUR	MA05FAF03RA <u>XX</u> RB14		
04 pins	10 02	1.0	601	601	26 AVAG	0.14	PVC	MA05FAF04RA <u>XX</u> CB14
	40 03	1A 60V 60V	60V	1A 60V	60V	26AWG	0.14	PUR

Note:  $\underline{X}$  refers to cable length

## ■ Remarks

- $\bullet \ Please \ refer \ to \ Page \ 578 \ for \ the \ Conversion \ between \ American \ Wire \ Gauge \ AWG \ and \ Wire \ Cross-section \ mm^2.$
- Please refer to Page 3 for products' part number encoding rule.

