


Micro-USB, Female Panel Mount, Solder, Front fastened

- Connector series: Micro-USB
- Gender: Female
- Locking type: Fix screw
- Mounting type: Front fastened
- Part No.: MB-WF05STSP-MICRO

- suitable cable Dia: A: 3.5~4.5mm
B: 4.5~5.5mm

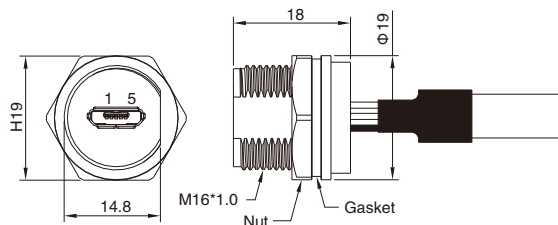

RoHS

General information


Ambient temperature:	-20°C ~ +80°C
Connector insert:	LCP+GF/PBT
Connector contacts:	Brass with gold plated
Connector nut/screw:	PA+GF
Connector body:	PA+GF
Seal / O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 30mΩ
Shielding:	Available
IP rating:	IP67 in locked condition

Electrical data & Mechanical data

Contacts		Contacts termination	Rated current	Voltage		Wire insulation	Part No.
				A/C	D/C		
Micro USB	 5P Micro B female	Solder version	1A	30V	30V	PVC wire or customized	MB-WF05STSP-MICRO

Panel Cut-out Dimensions

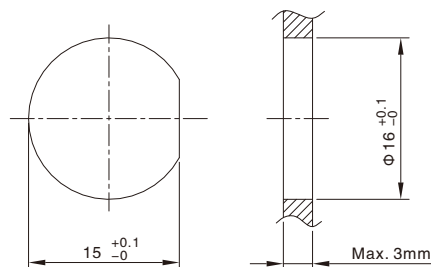

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 449 for products' part number encoding rule.