



NEW !

SPECIFICATIONS:


RATING: Ø22mm 0.5A 220VAC / 0.7A 24VDC
 Ø8/10/12/16mm 0.5A 220VAC / 0.7A 24VDC
 ELECTRICAL LIFE: 50,000 cycles.
 CONTACT RESISTANCE: 100m-ohms max.
 TERMINAL OPTION: Solder lug.
 ACTUATOR TYPE: Round / Square / Key / Rotator button.

FEATURES:

- Ø22mm: IP40 or IP65
- Illuminated button with laser etched symbols
- SPDT & DPDT in momentary or alternate functions
- Frame color available in black or silver


If your preferred product configuration is not shown, please contact our sales representative for custom design.

HOW TO ORDER SYSTEM

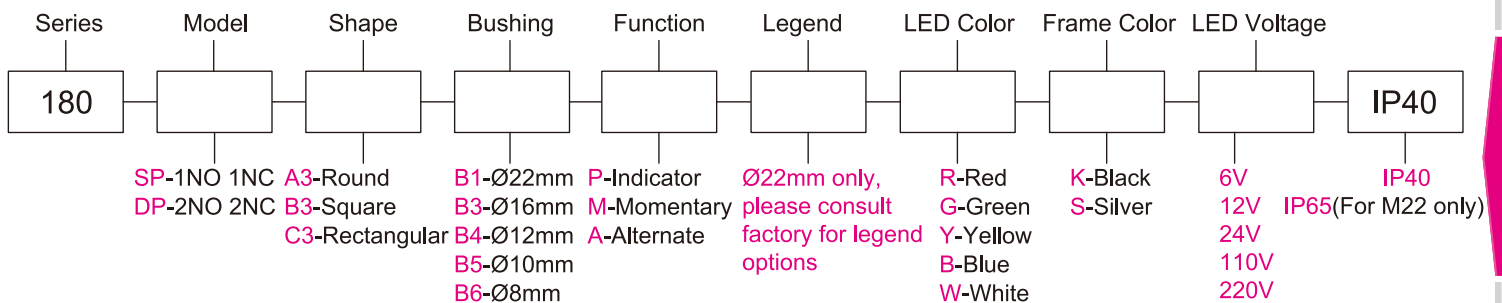


Circuit Diagram

1NO 1NC



2NO 2NC



Shape

A3 Round



B3 Square



C3 Rectangular



Toggle

Rocker

Slide

Pushbutton

AV

Rotary


Tact

Touch Key


Miscellaneous

Bushing


B1

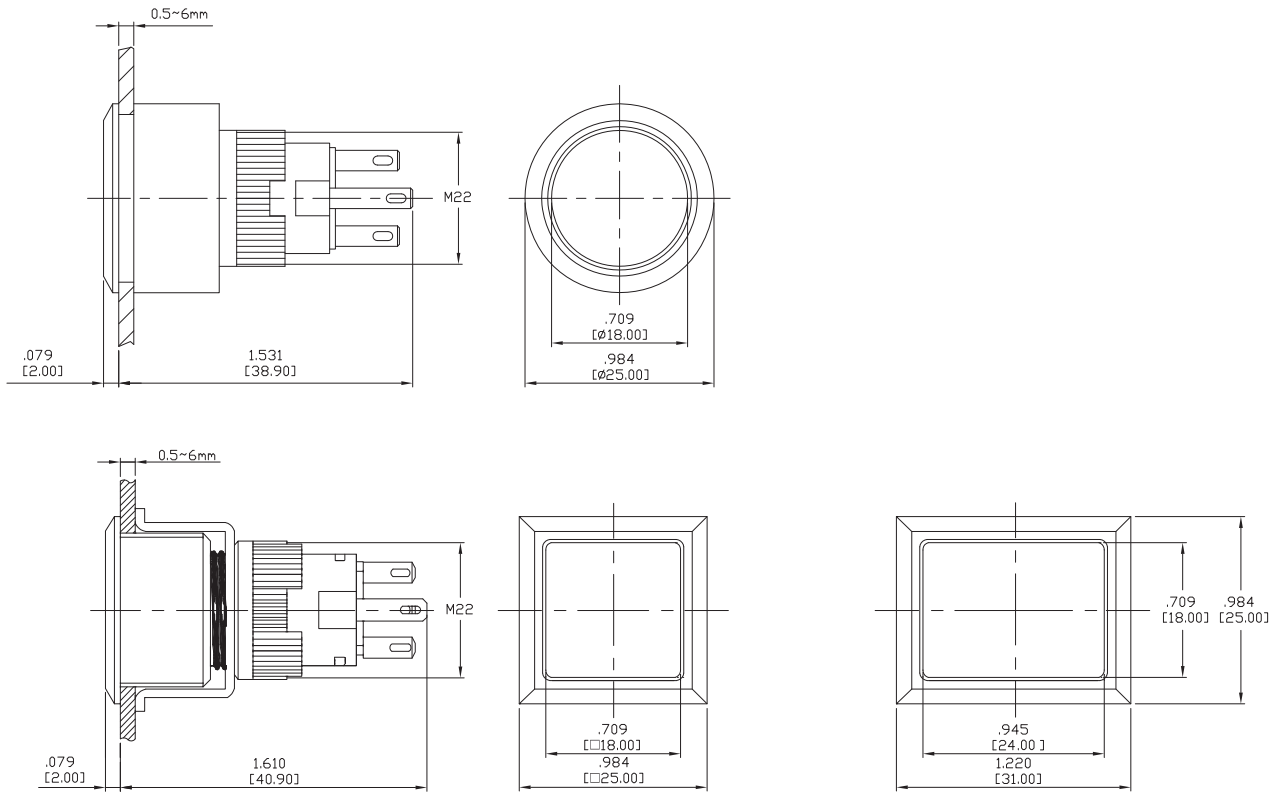


B3

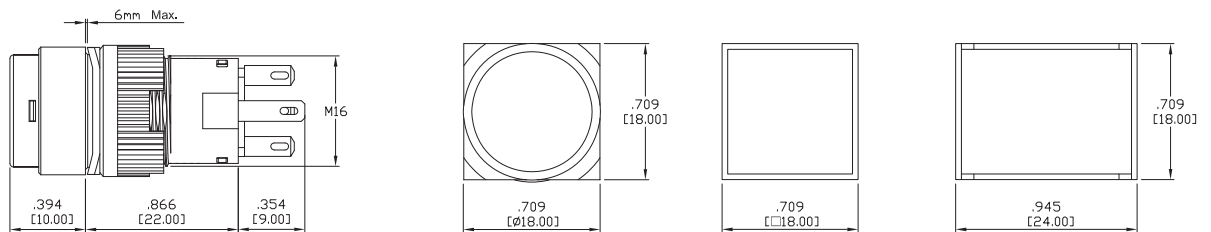


B4

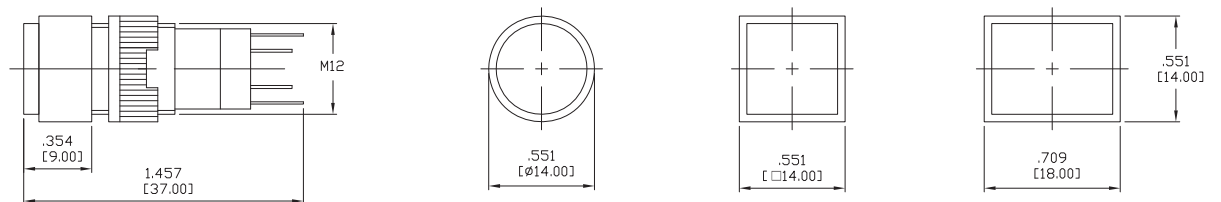

B5

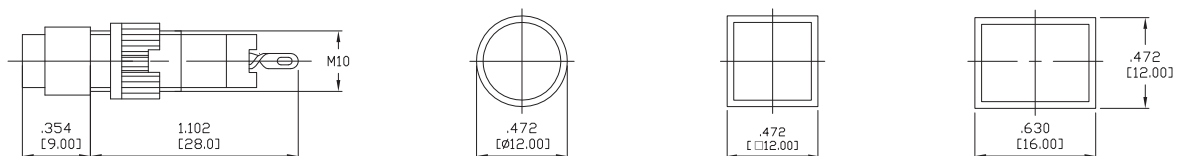

B6

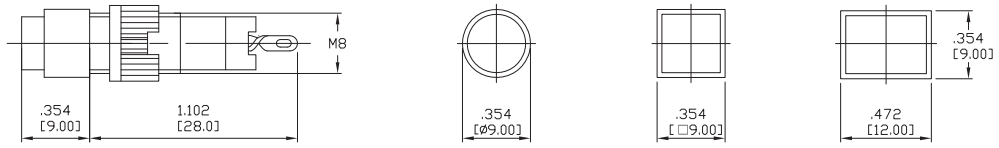

- Toggle
- Rocker
- Slide
- Pushbutton**
- AV
- Rotary
- Tact
- Touch Key
- Miscellaneous