

**SPECIFICATIONS:**

CONTACT RATING: DC 12V 0.5A.  
 CONTACT RESISTANCE: 30mΩ max.  
 MECHANICAL LIFE: 1,000 cycles.  
 INSULATION RESISTANCE: 500MΩ min. at 500VDC.


**MATERIALS:**

HOUSING: Nylon 6/6 (UL94V-0).  
 SLIDE HANDLE: Nylon 6/6 (UL94V-0).  
 TERMINAL: Brass, gold over nickel plated.

Specifications and Dimensions subject to change

If your preferred product configuration is not shown, please contact our sales representative for custom design.

**HOW TO ORDER SYSTEM**

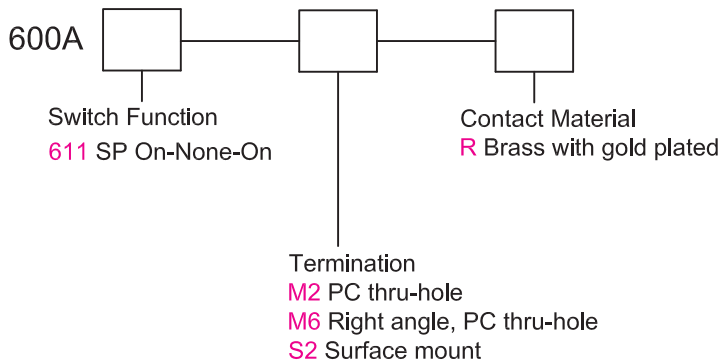

# Series 600A


# Low Power Slide Switches

M2

P.C.MOUNTING



Model No.	Switching Position		
611	ON	NONE	ON
Term. Comm.	2-1	OPEN	2-3

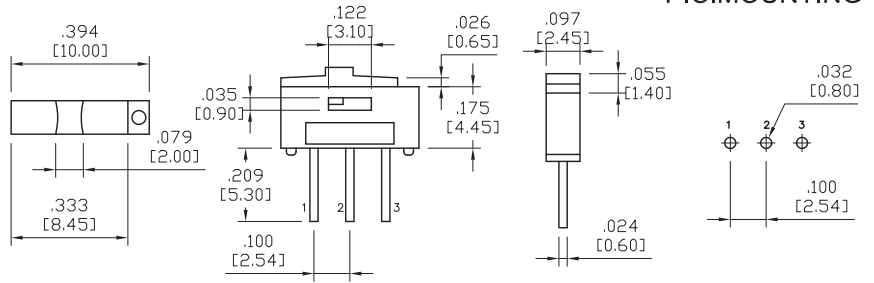


SPDT

M6

P.C.MOUNTING



Model No.	Switching Position		
611	ON	NONE	ON
Term. Comm.	2-1	OPEN	2-3



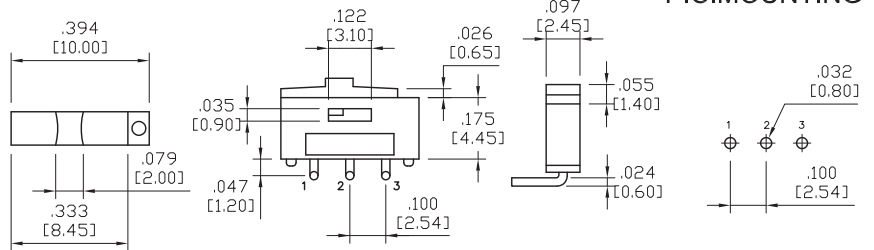


SPDT

S2

P.C.MOUNTING

Model No.	Switching Position		
611	ON	NONE	ON
Term. Comm.	2-1	OPEN	2-3

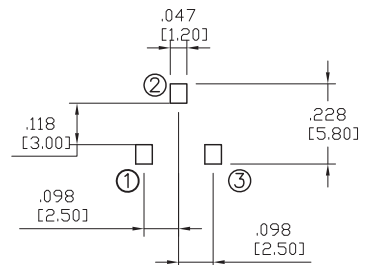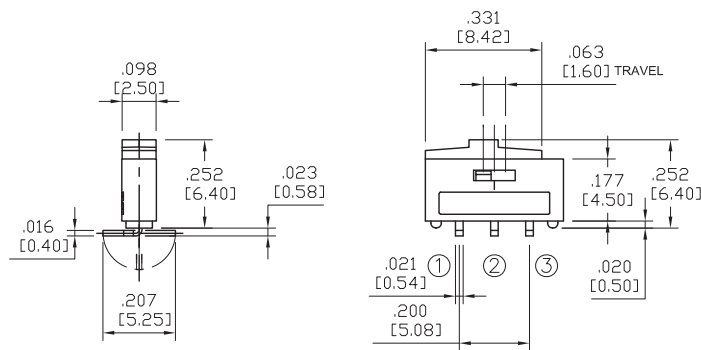

SPDT

## CONTACT MATERIAL OPTIONS

Coding	Contact & Terminal Material	Rating	Agency Approvals
R	Brass with gold plating	0.5A @ 12VDC	