


TACT SWITCH DTSJW()-6 SERIES

6x6 J SMT
Washable Type

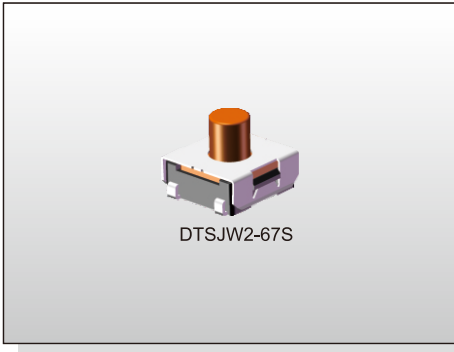

FEATURES

- ※ Sealed
- ※ Gold contact available
- ※ Dust proof with high reliability


APPLICATION

- ※ Audio, OA equipment
- ※ Instrumentation, Communication
- ※ White goods


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	200±50gf, 400±100gf
Travel	0.4/0.6mm
Operating Life	300, 000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

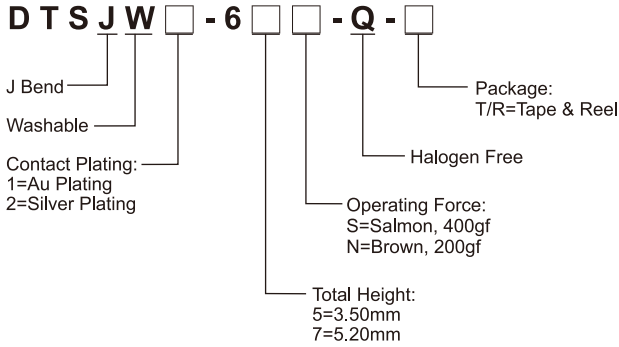

CIRCUIT

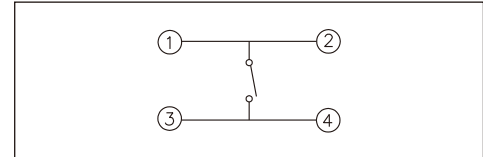


PACKAGE

<Tape & Reel>




DTSJW□-65: 1900 pcs
DTSJW□-67: 900 pcs

TACT SWITCH

DTSJW□-6



PART NO.	H
DTSJW□-65	3.50
DTSJW□-67	5.20

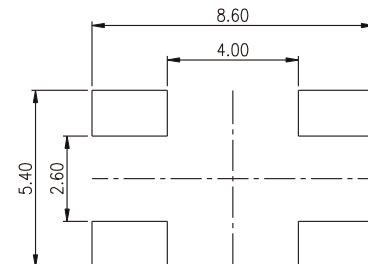

P.C.B. LAYOUT