Detector
Vertical Type (13.3x8.2x13.4mm)

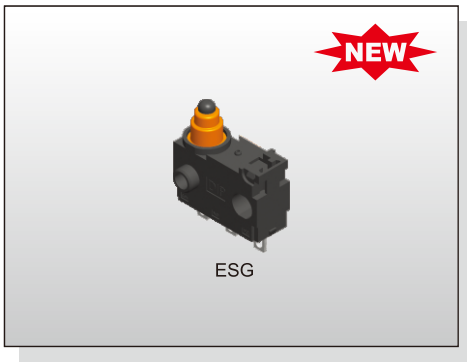

FEATURES
※PC board terminals option
※Solder terminals option with wire
※IP67 dust and water resistance
※With Internal Resistors option

APPLICATION
※White goods
※Automotive
※Motorcycle

SPECIFICATION

Contact Rating	1mA, 5V DC 0.1A, 30V DC
Contact Resistance	1Ω max.
Insulation Resistance	100MΩ min.
Dielectric Strength	600V AC/1 minute
Operating Force	153gf max.
Operating Position	NC OP 8.7±0.3mm NO OP 8.4±0.3mm
Operating Life	10mA, 14V DC 500,000 cycles 0.1A, 30V DC 200,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

E S G - □ □ □ □ □ V

- Cover Type: 1=M3 Screw Mounting
- Rating: G=Contact Silver Plated
- Actuator: 0=Pin Plunger
- Contact Form: 1=SPDT
- Terminal Type: 1=PC Board Terminal Type, 2=Lead Terminal Type
- Lead Free

CIRCUIT

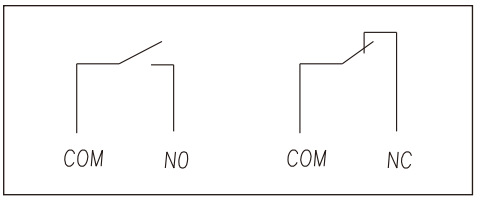

PACKAGE
<Bag>
250 pcs
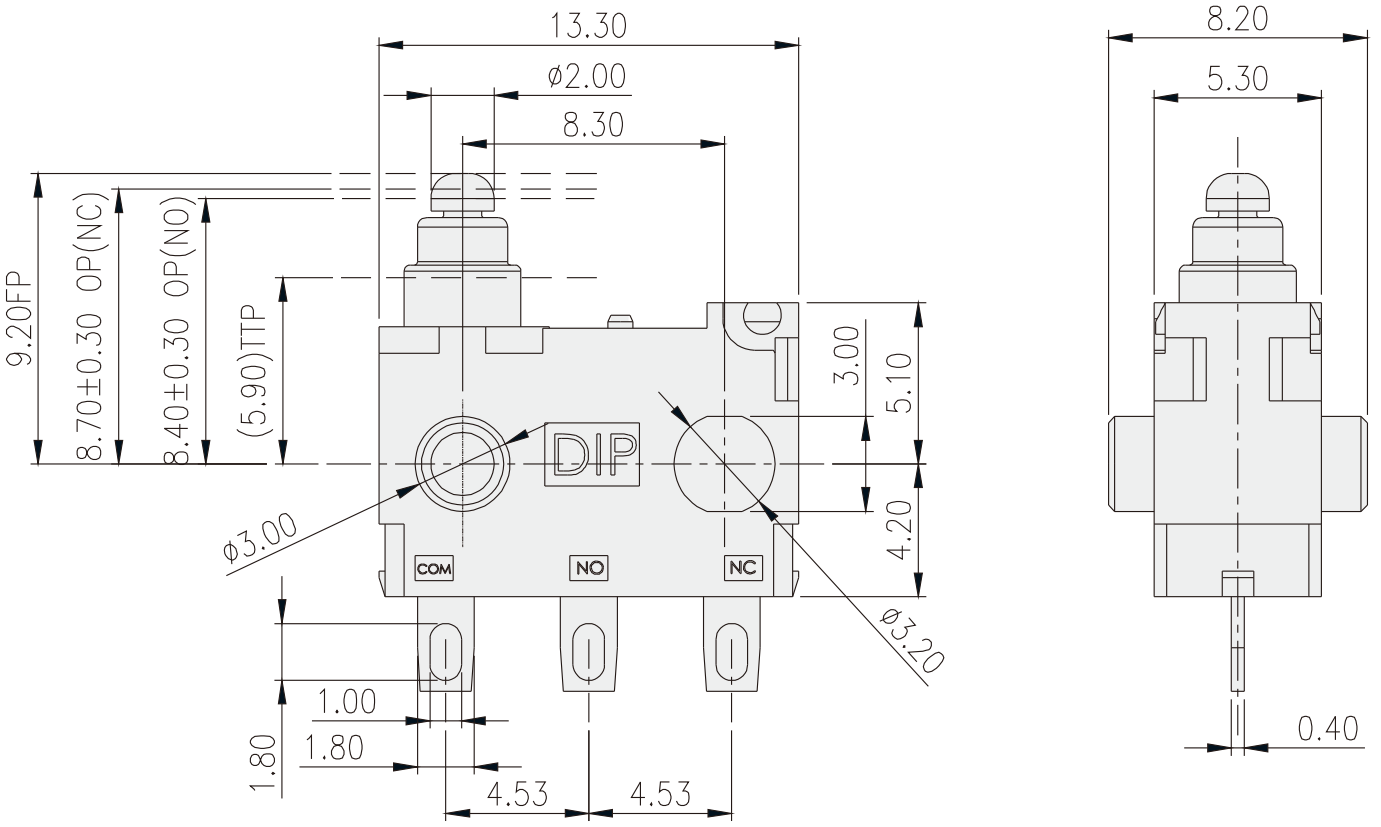
ESG