

**FEATURES**

- ※Ultra-low profile with 2.0mm
- ※Sharp detection feeling


**APPLICATION**

- ※Detection of car audio mechanism
- ※Smoke detector
- ※Notebook
- ※Industrial application
- ※3C products


**SPECIFICATION**

Contact Rating	10mA, 5V DC
Contact Resistance	1Ω max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	150gf max.
Travel	2.0mm
Operating Life	100,000 cycles
Operating Temp.	-25°C ~ +105°C
Storage Temp.	-40°C ~ +105°C

**HOW TO ORDER**

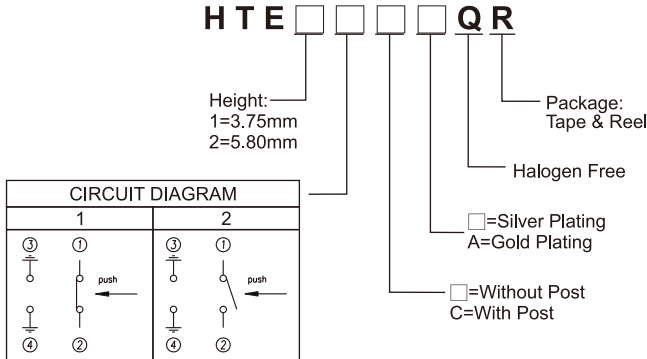

**CIRCUIT**

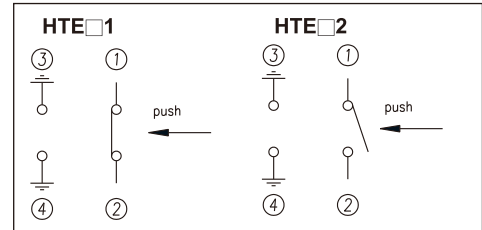

**PACKAGE**

<Tape & Reel>  
3000 pcs

DETECTOR SWITCH

