


# MR-4 SERIES ROCKER SWITCHES



MR-4-210-C5N-BB    MR-4-210-C5L-BG    MR-4-230-C6N-BB    MR-4-210-D5N-BB    MR-4-220-HON-BB    MR-4-210-C5L-BG+防水帽


## SPECIFICATIONS

Rating :12A 125VAC (UL CUL)  
 :10A 250VAC (VDE CQC ENEC)  
 Contact Resistance :50mΩ Max  
 Insulation Resistance :DC 500V 100MΩ Min  
 Dielectric Strength :AC 1500V 1 minute  
 Electrical Life :10,000 Cycles  
 Safety Approval



	X	Y
	0.75~1.25	19.2-0.1 21.9~22.0
	1.25~2.00	19.4-0.1 21.9~22.0
	2.00~3.00	19.8-0.1 21.9~22.0

MOUNTING HOLE

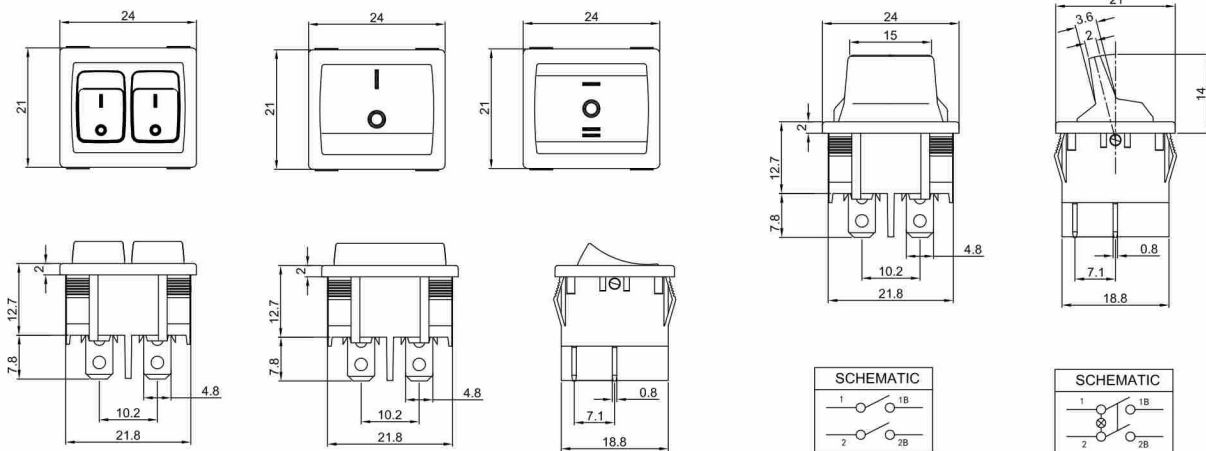

Model 型号	Function 功能	Terminal type 端子种类	Actuator shape 柄形状	Marking 印字	Illuminated 带灯指示	Body color 底座颜色	Actuator color 柄颜色	Light Voltage 灯电压
MR-4 210 C5N BB 12	21 ON-OFF 4P	0	C	0 None	N None 不带灯	B Black 黑色	B Black 黑色	None
	22 ON-ON 6P	1	D	1	L Neon 氖灯	A Gray 灰色	R Red 红色	12 12V
	23 ON-OFF-ON 6P	1	H	2	W Tungsten 钨丝灯	W White 白色	A Gray 灰色	110 110V
	24 OFF-(ON) 4P			3			W White 白色	220 220V
	25 ON-(OFF) 4P			4			Y Yellow 黄色	
	26 (ON)-ON 6P			5			U Blue 蓝色	
	27 (ON)-OFF-(ON) 6P			6			G Green 绿色	
				7				
				8				

带灯轻触开关

带灯按钮开关

按钮开关

金属按钮开关

翘板开关

保险丝座

光电触摸开关

旋转开关