

PB01 SERIES PUSH BUTTON SWITCHES

带灯轻触开关

带灯按钮开关



SPECIFICATIONS









Rating	:3A 125V AC 1.5A 250VAC
Contact Resistance	:50mΩ Max
Insulation Resistance	:100MΩ Min
withstand Voltage	:1000VAC for 1 Minute
Operating Force	:250±50gf or 450±100gf
Travel	:2.0±0.4mm
Life Cycle	:50,000Cycles
Function	:OFF-(ON) ON-OFF

按钮开关

金属按钮开关



PB01-YB-MM-R PB01-YB-PP-R







翘板开关

保险丝座



PB01-YA-PP-G PB01-FA-PP-R



光电触摸开关

旋转开关

PB01	Y	B	P	M	R
Model 型号	Actuator Type 按钮类型		Body Material 基座材质		Nut Material 螺母材质
	Y	F	P	M	P
			Plastic 塑胶	Metal 金属	Plastic 塑胶
	圆形	方型			Metal 金属
	Function 功能		Cap Color 上盖颜色		
	A	B	C	R	G
	ON-OFF 自锁	OFF-(ON) 常开	ON-(OFF) 常闭	Red 红色	Green 绿色
				B	Black 黑色
				Y	Yellow 黄色
				W	White 白色






SPECIFICATIONS





Rating	:6A 125V AC/3A 250VAC
Contact Resistance	:50mΩ Max
Insulation Resistance	:DC500V 100MΩ
withstand Voltage	:1000VAC for 1 Minute
Operating Force	:300±50gf
Travel	:2.0±0.4mm
Life Cycle	:50,000Cycles
Function	:OFF-(ON)



PB02-M-R



PB02-M-G

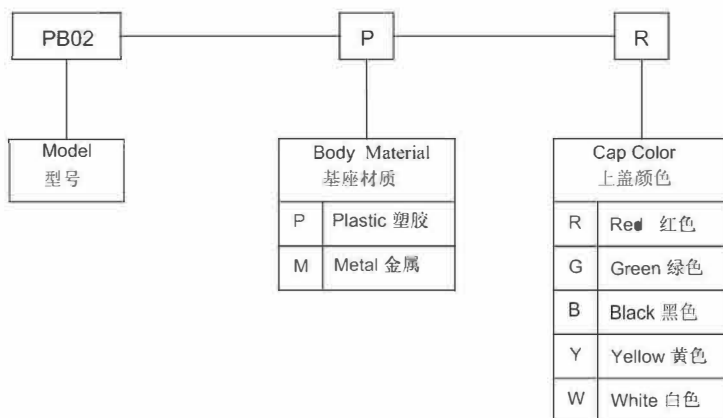

带灯轻触开关

带灯按钮开关

按钮开关

金属按钮开关

翘板开关

保险丝座

光电触摸开关

旋转开关