

# SR-A SERIES ROCKER SWITCHES



SR-A-110-C5N-BB



SR-A-114-C5N-BB



SR-A-130-C6N-BB



SR-A-111-W2E-BB




SR-A-111-F0E-BG














防水帽

## SPECIFICATIONS

Rating	:6A 125VAC 3A 250VAC
Contact Resistance	:50mΩ Max
Insulation Resistance	:AC 500V 100MmΩ Min
Dielectric Strength	:AC 1500V 1 minute
Operating Force	:300±100gf
Mechanical Life	:50,000cycles
Load Life	:10,000cycles
Operating Temperature	:0°C~85°C
Safety Approval	



	X	Y
0.75~1.25	13.6-0.1	9.2±0.1
1.25~2.00	13.7-0.1	9.2±0.1
2.00~3.00	13.8-0.1	9.2±0.1

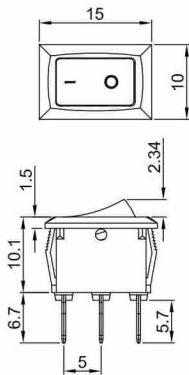

SR-A — 1 1 0 — C 5 N — B B — 12

Model 型号	Function 功能	Terminal type 端子种类	Actuator shape 柄形状	Marking 印字	Illuminated 带灯指示	Body color 底座颜色	Actuator color 柄颜色	Light Voltage 灯电压
11	ON-OFF 2P	0	C	0 None	N None 不带灯	B Black 黑色	B Black 黑色	- NONE
12	ON-ON 3P	1	F	1	L Neon 氖灯	A Gray 灰色	R Red 红色	12 12V
13	ON-OFF-ON 3P	3	H	2	W Tungsten 钨丝灯	W White 白色	A Gray 灰色	110 110V
		4	W	3	E LED 灯		W White 白色	220 220V
		5		4			Y Yellow 黄色	
		6		5			U Blue 蓝色	
		8		6				
		9		7				
		4A		8				

NOTICES:

- 端子种类4代表弯向:
- 端子种类4A代表弯向:
- 端子种类5代表弯向:

带灯轻触开关

带灯按钮开关

按钮开关

金属按钮开关

翘板开关

保险插座

光电触摸开关

旋转开关

# SR-B SERIES ROCKER SWITCHES



SR-B-110-C5N-BB



SR-B-110-C5E-BR



SR-B-110-C5E-BG



SR-A-111-H0E-BB



SR-A-111-H0E-BU




防水帽

## SPECIFICATIONS

Rating	:6A 125VAC 3A 250VAC
Contact Resistance	:50mΩ Max
Insulation Resistance	:DC 500V 100MΩ Min
Dielectric Strength	:AC 1500V 1 minute
Operating Force	:250±100gf
Mechanical Life	:50,000cycles
Load Life	:10,000 Cycles
Operating Temperature	: -20°C~85°C
Safety Approval	

### CUT-OUT



	X	Y
0.75-1.25	13.6-0.1	9.2±0.1
1.25-2.00	13.7-0.1	9.2±0.1
2.00-3.00	13.8-0.1	9.2±0.1

### CUT-OUT

