

TS11 SERIES LED TACT SWITCHES

带灯轻触开关

带灯按钮开关

按钮开关


金属按钮开关

翘板开关

保险丝座

光电触摸开关

旋转开关


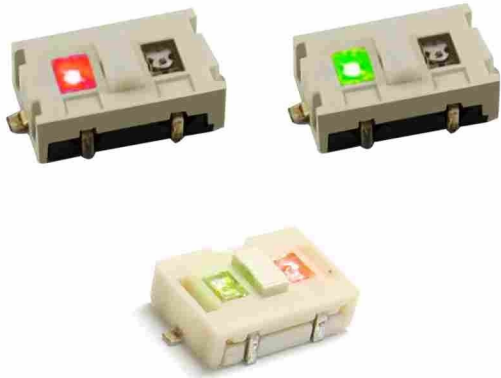


SPECIFICATIONS


| | |
|---------------------------------|------------------------|
| Circuit | : SPST with LED |
| Current Rating | : 50mA |
| Voltage Rating | : 12VDC |
| Dielectric withstanding voltage | : 250VAC for 1 minute |
| Contact Resistance | : 500mΩ Max. (initial) |
| Insulation Resistance | : 100MΩ Min. |
| Operating Force | : 160+75/-30gf |
| Total Travel | : 0.25+0.2/-0.1mm |
| Operating Force | : 30,000 Cycles Min |
| Solder Specifications | : 260°C for 5 Seconds |
| Function | : Momentary |
| Operating Temperature | : -20°C+70°C |





TS11-N-A-RG-RG-P



P.C.B. LAYOUT



CIRCUIT



| | | | | | | | |
|-------------|--------------------------------|--------------------------------|--------------------------------|------------------|---------------------------------|------------------|------------------------|
| TS11 | N | A | U | R | U | W | P |
| MODEL 型号 | OPERATION 操作 | CIRCUIT 电路 | LEFT LED BRIGHTNESS 左灯亮度 | LED COLOR 灯颜色 | RIGHT LED BRIGHTNESS 右灯亮度 | LED COLOR 灯颜色 | TERMINAL SHAPE 端子形状 |
| | N NON-LOCK (std.) 非锁定 | A A CIRCUIT (std.) 常规 | U ULTRA (std.) 超亮 | N Without LED | U ULTRA (std.) 超亮 | N Without LED | S |
| | | | R REGULAR 普亮 | R Red 红灯 | R REGULAR 普亮 | R Red 红灯 | |
| | | | N WITHOUT LED | Y Yellow 黄灯 | Y Yellow 黄灯 | Y Yellow 黄灯 | P |
| | | | | G Green 绿灯 | N WITHOUT LED | G Green 绿灯 | |
| | | | | U Blue 蓝灯 | | U Blue 蓝灯 | |
| | | | | W White 白灯 | | W White 白灯 | |
| | | | | O Orange 橙色 | | O Orange 橙色 | |