

WR-6 PUSH BUTTON SWITCHES






PRODUCT SPECIFICATION:

Rating: 12A 125V AC
 10A 250V AC
 Degree of protection: IP65;
 Contact Resistance: 50mΩ Max. ;
 Insulation Resistance: DC 500V 100MΩ Min. ;
 Dielectric Strength: AC 1500V 1 minute
 Operating Force: 600±150gf
 Mechanical Life: 50,000 cycles
 Load Life: 10,000 cycles
 Operating Temperature: 0C~85C


Application:

Computer Peripherals 电脑外设
 Telecommunications network 电信网络
 TV Set-top box 电视机顶盒
 Lamp Lighting 灯具照明
 Consumer Electronics 消费类电子
 Household appliances 家用电器
 Car Rail Transportation 汽车轨道交通
 Electronic toys 电子玩具
 Power Tools Series 电动工具类
 Industrial automation 工业自动化


DRAWING

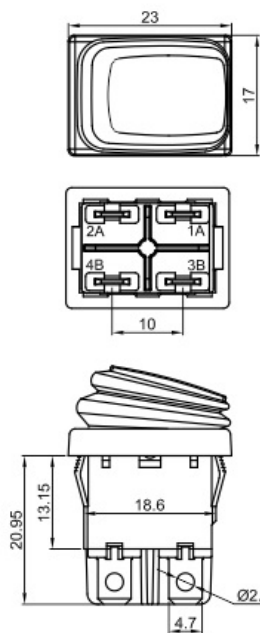

CUT-OUT



	X	Y
0.75~1.25	19.2+0.1	13.0+0.1
1.25~2.00	19.4+0.1	13.0+0.1
2.00~3.00	19.8+0.1	13.0+0.1



x	0	1	2	4	5
Marking	None	•	ON OFF	○ —	○

MATERIAL:

Body: Nylon66, UL rated: 94V-2 min
 Actuator: PC
 Terminal: Brass, silver plated

WR6 HOW TO ORDER

WR6 开关型号编码规则

