


ROTARY CODED SWITCH SV3A-4 SERIES

10x10mm
Selector Rotary Type

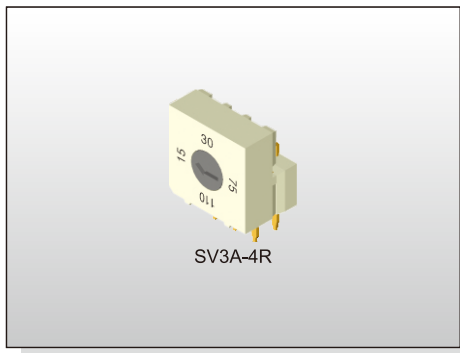

SV3A-4R

FEATURES

- ※ Through hole pin type
- ※ Flush Actuator
- ※ 20,000 steps mechanical Life

APPLICATION


- ※ Building & home automation
- ※ White goods
- ※ Electronic instrument

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 250V DC
Dielectric Strength	250V AC/1 minute
Operating Force	200gf·cm max.
Operating Life	20,000 steps
Operating Temp.	-25°C ~ +80°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

SV3A-4R-V-B



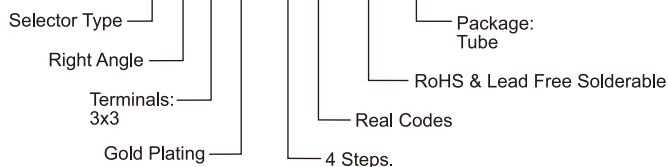


PACKAGE


<Tube>
48 pcs

ROTARY CODED SWITCH

SV3A-4

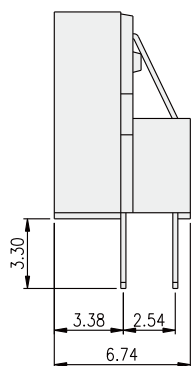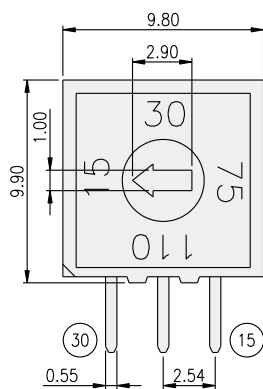

POSITION	CODE			
	15	30	75	110
15	○	●	●	●
30	●	○	●	●
75	●	●	○	●
110	●	●	●	○



P.C.B. LAYOUT