

TT5

### FEATURES

- ※Low-Profile of height 1.55mm
- ※Sharp operation feeling

### APPLICATION


- ※Portable electronic devices
- ※Remote control
- ※Industrial applications

### SPECIFICATION


Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±60gf, Side 320+80/-60gf, Center
Travel	0.25mm
Operating Life	200,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-40°C ~ +85°C

### HOW TO ORDER

TT5-V-



### CIRCUIT

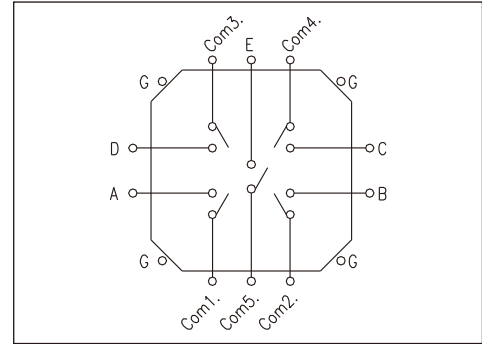

### PACKAGE

- <Tube>  
47 pcs
- <Tape & Reel>  
2500 pcs

### TT5

