

10W UI39/8 FAUI3908 SERIES



FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.28kg
- Packaging unit: 10 pieces [tray]
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 7513 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


PHYSICAL CHARACTERISTICS

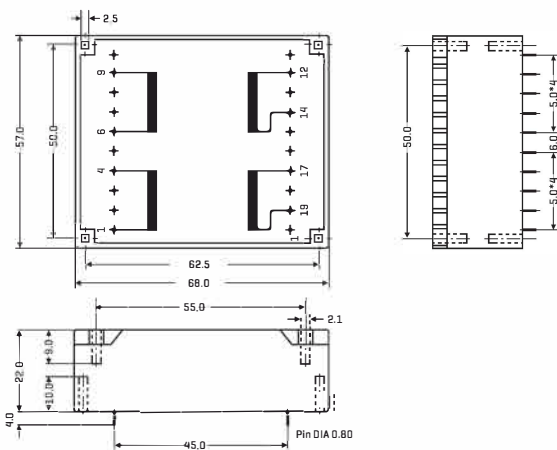

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI390837	2*115	2*6/833	2*8.2
FAUI390838	2*115	2*9/555	2*12.3
FAUI390839	2*115	2*12/416	2*16.4
FAUI390840	2*115	2*15/333	2*20.5
FAUI390841	2*115	2*18/277	2*24.6
FAUI390842	2*115	2*24/208	2*32.8

TECHNICAL INFORMATION

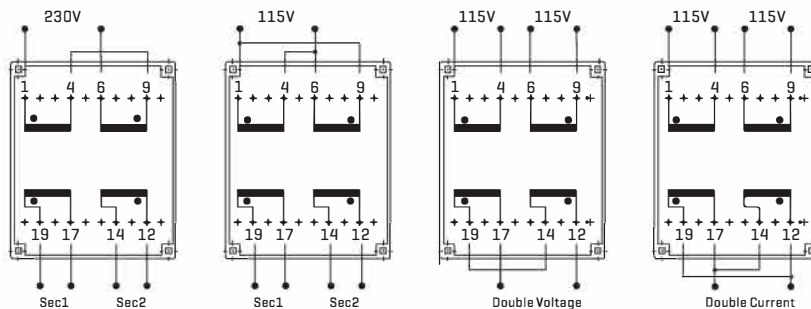

ALL DIMENSIONS IN MM

14W UI39/10.2 FAUI3910 SERIES



FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.315kg
- Packaging unit: 10 pieces (tray)
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 7513 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


PHYSICAL CHARACTERISTICS

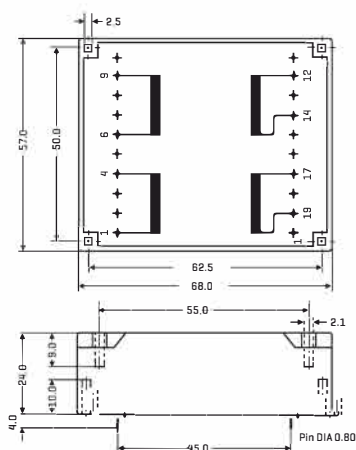

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI391043	2*115	2*6/1166	2*7.5
FAUI391044	2*115	2*9/778	2*11.2
FAUI391045	2*115	2*12/583	2*15.0
FAUI391046	2*115	2*15/467	2*18.8
FAUI391047	2*115	2*18/389	2*22.4
FAUI391048	2*115	2*24/292	2*30.0

TECHNICAL INFORMATION

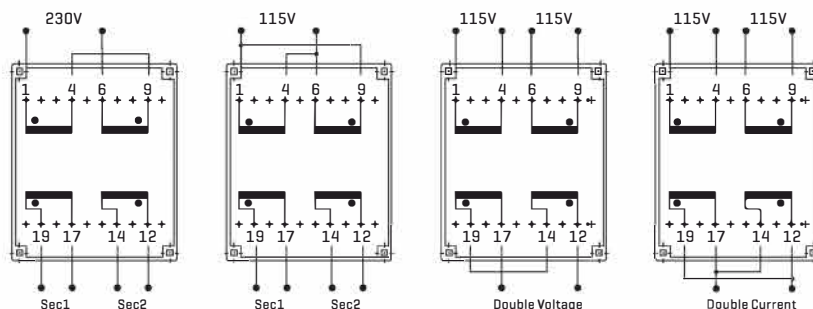

ALL DIMENSIONS IN MM

18W UI39/13.5 FAUI3913 SERIES



FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.375kg
- Packaging unit: 10 pieces [tray]
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 7513 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


PHYSICAL CHARACTERISTICS

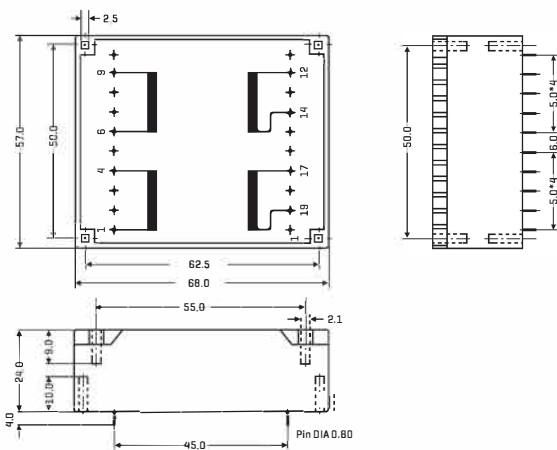

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI391349	2*115	2*6/1500	2*7.7
FAUI391350	2*115	2*9/1000	2*11.3
FAUI391351	2*115	2*12/750	2*15.3
FAUI391352	2*115	2*15/600	2*19.4
FAUI391353	2*115	2*18/500	2*22.5
FAUI391354	2*115	2*24/375	2*30.6

TECHNICAL INFORMATION

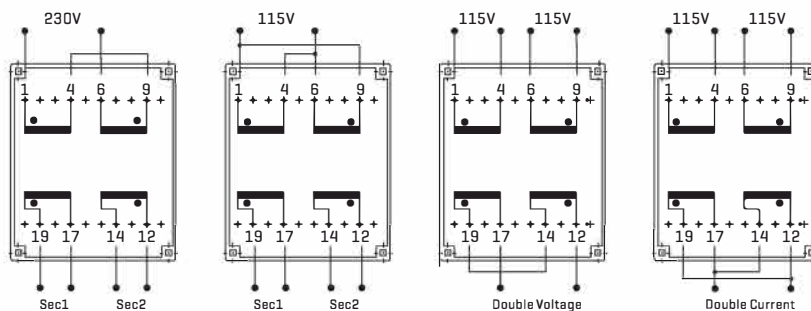

ALL DIMENSIONS IN MM

24W UI39/17 FAUI3917 SERIES



FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.445kg
- Packaging unit: 10 pieces (tray)
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 7513 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


PHYSICAL CHARACTERISTICS

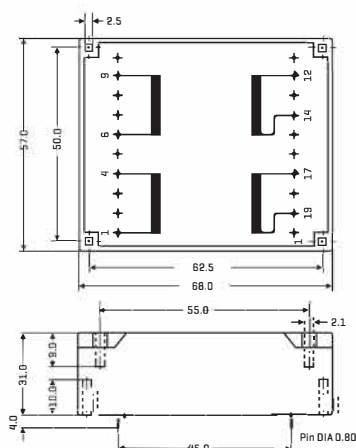

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI391755	2*115	2*6/2000	2*7.2
FAUI391756	2*115	2*9/1333	2*11.1
FAUI391757	2*115	2*12/1000	2*14.4
FAUI391758	2*115	2*15/800	2*19.2
FAUI391759	2*115	2*18/666	2*22.1
FAUI391760	2*115	2*24/500	2*28.8

TECHNICAL INFORMATION

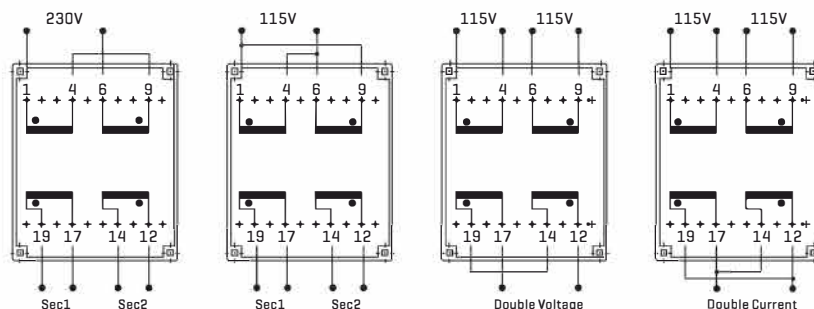

ALL DIMENSIONS IN MM

30W UI39/21 FAUI3921 SERIES



FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.53kg
- Packaging unit: 10 pieces [tray]
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 7513 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


PHYSICAL CHARACTERISTICS

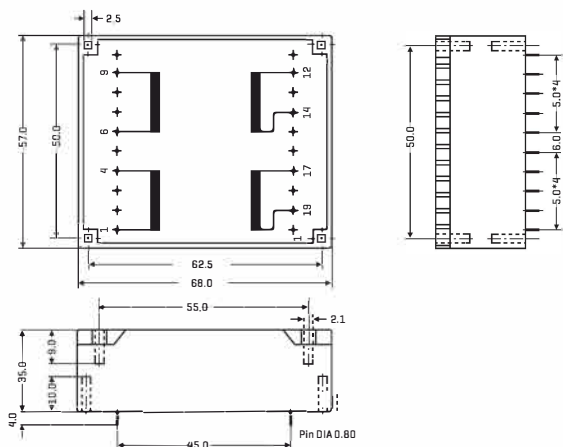

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI392161	2*115	2*6/2500	2*6.7
FAUI392162	2*115	2*9/1666	2*10.3
FAUI392163	2*115	2*12/1250	2*13.5
FAUI392164	2*115	2*15/1000	2*16.8
FAUI392165	2*115	2*18/833	2*20.6
FAUI392166	2*115	2*24/625	2*27.0

TECHNICAL INFORMATION

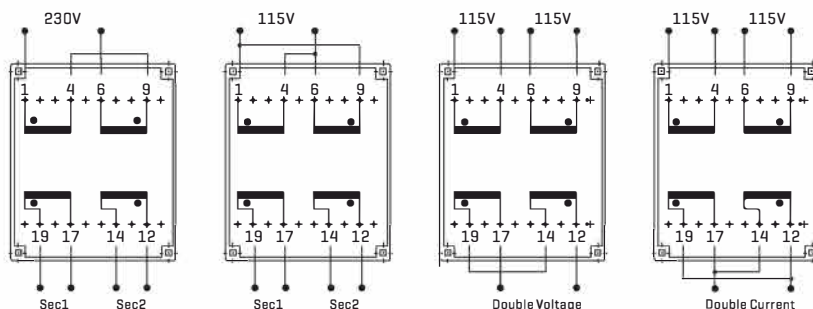

ALL DIMENSIONS IN MM