


M8 Female Molded Cable, Angled, Plastic Nut

- Connector series: M8
- Gender: Female
- Coding: A,B
- Locking type: Plastic fix screw
- Mounting type: Right angled
- Part No.: MA08F**P**RAXXXXXX

* refers to coding type
 ** refers to pins number
 X refers to cable specification

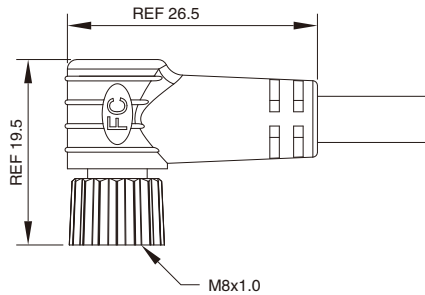

General information

Standard:	IEC 61076-2-104
Ambient temperature:	-40°C ~ +80°C(fixed installation) -20°C ~ +80°C(flexible installation)
Connector insert:	TPU; PA
Connector contacts:	Brass with gold plated
Connector overmold:	TPU
Connector nut/screw:	PA+GF
Seal / O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance:	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP67 in locked condition
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts	Rated current	Voltage		Wire gauge / size		Cable jacket	Part No.
		A/C	D/C	AWG	mm ²		
03 pins (A-coding)	3A	50V	60V	24AWG	0.25	PVC	MA08FAP03RAXXC _B 25
						PUR	MA08FAP03RAXXR _B 25
04 pins (A-coding)	3A	50V	60V	24AWG	0.25	PVC	MA08FAP04RAXXC _B 25
						PUR	MA08FAP04RAXXR _B 25
05 pins (B-coding)	3A	30V	30V	24AWG	0.25	PVC	MA08FBP05RAXXC _B 25
						PUR	MA08FBP05RAXXR _B 25
06 pins (A-coding)	1.5A	30V	30V	26AWG	0.14	PVC	MA08FAP06RAXXC _B 14
						PUR	MA08FAP06RAXXR _B 14
08 pins (A-coding)	1.5A	30V	30V	26AWG	0.14	PVC	MA08FAP08RAXXC _B 14
						PUR	MA08FAP08RAXXR _B 14

*06 Pin,08 Pin with different overmold from above other pins

Note: X refers to cable length

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 22 for products' part number encoding rule.